

SSL UC1

User Guide



Solid State Logic

O X F O R D • E N G L A N D

Visit SSL at:
www.solidstatelogic.com

© Solid State Logic

All rights reserved under International and Pan-American Copyright Conventions.

SSL® and Solid State Logic® are registered trademarks of Solid State Logic.

SSL UC1™ is a trademark of Solid State Logic.

All other product names and trademarks are the property of their respective owners and are hereby acknowledged.

Pro Tools® is a registered trademark of Avid®.

Logic Pro® and Logic® are registered trademarks of Apple® Inc.

Cubase® and Nuendo® are trademarks of Steinberg® Media Technologies GmbH.

Live™ is a trademark of Ableton® AG.

Studio One® is a registered trademark of Presonus® Audio Electronics Inc.

REAPER® is a trademark of Cockos Incorporated.

LUNA™ is a trademark of Universal Audio® Inc.

Bitwig Studio® is a registered trademark of Bitwig GmbH.

Digital Performer® is a registered trademark of MOTU Incorporated.

FL Studio® is a registered trademark of Image Line NV.

Mixbus™ is a trademark of Harrison Audio LLC.

No part of this publication may be reproduced in any form or by any means, whether mechanical or electronic, without the written permission of Solid State Logic, Begbroke, OX5 1RU, England.

As research and development is a continual process, Solid State Logic reserves the right to change the features and specifications described herein without notice or obligation.

Solid State Logic cannot be held responsible for any loss or damage arising directly or indirectly from any error or omission in this manual.

PLEASE READ ALL INSTRUCTIONS, PAY SPECIAL HEED TO SAFETY WARNINGS.

E&OE

Revision 13.1 - September 2026

Updated for SSL 360° V2.1

Refined Logic Pro OSC setup pages

Table of Contents

Overview	5
What is SSL UC1?	5
SSL 360° Enabled Plug-ins UC1 Can Control	5
Features	5
Supported DAWs - For UC1 & The Plug-in Mixer	5
6 Things About UC1	6
UC1/Plug-in Mixer DAW Integration	7
Get-Started	8
Unpacking	8
Fitting The Stands (Optional)	8
Connecting Your UC1 Hardware	10
Downloading SSL 360° and 360°-enabled Plug-ins	11
Redeeming and Authorising Your Plug-in Licenses	12
UC1	15
Front Panel	15
Central Control Panel	19
UC1/360°-Enabled Channel Strip Plug-ins	23
SSL Channel Strip 2	23
SSL 4K B	23
SSL 4K E	24
SSL 4K G	24
Harrison 32Classic Channel Strip v2	25
SSL 360 Link	25
UC1/360°-Enabled Bus Compressor Plug-ins	28
Bus Compressor 2	28
360 Link Bus Compressor	28
SSL 360° Software	29
Home Page	29
Control Setup Page	31
Logic Pro Enhanced DAW Control Integration	32
Plug-in Mixer	34
Transport Control & Hybrid Mode Setup	45
Introduction	45
Plug-in Mixer Transport & Hybrid Mode - Setup	46
Pro Tools	47
Logic Pro	48
Cubase	49
Live	50
Studio One	51
LUNA	52
REAPER	53
Digital Performer	54
Bitwig Studio	55
FL Studio	56

Mixbus 11	57
UC1 LCD Messages	58
SSL 360° Software Messages	59
SSL Support - FAQs, Ask a Question and Compatibility	60
Safety Notices	61

Overview

What is SSL UC1?

UC1 is a hardware control surface that provides hands on control of your favourite plug-ins. It is designed to put the fun back into mixing, with a workflow that promotes muscle-memory operation and ultimate operator confidence. At the heart of UC1 is the truly innovative Plug-in Mixer; a place to view and control your channel strips and bus compressors side by side - it's like having a virtual SSL console inside your computer.



SSL 360° Enabled Plug-ins UC1 Can Control

- Your favourite 3rd party plug-ins via 360 Link & 360 Link Bus Compressor (included with UC1)
- SSL Channel Strip 2 (included with UC1)
- SSL Bus Compressor 2 (included with UC1)
- SSL 4K B (included with UC1)
- SSL 4K E (available to purchase at a discounted price for UC1/UF8/UF1 customers or available via subscription)
- SSL 4K G (available to purchase at a discounted price for UC1/UF8/UF1 customers or available via subscription)
- Harrison 32Classic Channel Strip v2 (available to purchase at a discounted price for UC1/UF8/UF1 customers or available via subscription)

Features

- Hands on control of SSL 360°-enabled 32C, 4K G, 4K E, 4K B, Channel Strip 2 and Bus Compressor 2 plug-ins.
- Hands on control of your favourite 3rd party plug-ins via the 360 Link plug-in & 360 Link Bus Compressor.
- Authentic moving-coil bus compressor gain reduction meter.
- SSL Plug-in Mixer provides a place to view and control your channel strips and bus compressors, all from one window.
- Muscle-memory operation and constant visual feedback via the smart LED rings.
- On-board display tells you which plug-ins UC1 is currently focused on.
- Load plug-in Presets and change channel strip routing directly from UC1 (360°-native plug-ins only).
- Switch between 3 different DAWs that are connected to the Plug-in Mixer.
- Hi-Speed USB connection to computer.
- Powered by SSL 360° Mac and PC software.

Supported DAWs - For UC1 & The Plug-in Mixer

- | | | |
|--------------------------|------------------------|------------------------------|
| • Pro Tools (AAX Native) | • Studio One (VST3) | • Digital Performer (VST3) |
| • Logic Pro (AU) | • REAPER (VST3) | • FL Studio (VST3) |
| • Cubase/Nuendo (VST3) | • LUNA (VST3) | • Mixbus 11 and above (VST3) |
| • Live (VST3) | • Bitwig Studio (VST3) | |

6 Things About UC1

UC1 follows you around – like a loyal dog or trusty sidekick

Opening a 360°-enabled plug-in in the DAW automatically causes UC1 to focus on that plug-in. UC1 also follows the selected DAW track automatically.

You don't have to look at the computer screen to use it.

You can scroll through and select the channel strip and bus compressor plug-in you want to control and see the DAW track name that the plug-in is inserted on, directly from UC1.

You can operate multiple controls at once

Some plug-in controllers are restrictive because they limit you to turning one knob at a time, which isn't very helpful when EQ'ing a source. Thankfully, this is not the case with UC1 - move two controls at once, no problem.

Use it with your favourite 3rd party plug-ins

Not only can UC1 work with natively SSL 360-enabled plug-ins such as 32C, 4K G, 4K E, 4K B, Channel Strip 2 and Bus Compressor 2, it can also work with your favourite 3rd party plug-ins via 360 Link and 360 Link Bus Compressor hosting plug-ins.

The Bus Compressor Meter

The bus compressor meter brings a new dimension to mixing with plug-ins by providing a truly analogue experience. The meter is driven from Bus Compressor 2 or compatible 3rd party plug-ins hosted in 360 Link Bus Compressor, allowing you to allow keep an eye on compression levels.

The SSL 360° Plug-in Mixer

All of your 360°-enabled plug-ins in one place - get that big console workflow and feeling.

UC1/Plug-in Mixer DAW Integration

DAW integration between UC1/Plug-in Mixer and your DAW varies, depending on which DAW you are using. Below is a table summarising the current levels of DAW integration.

Enhanced DAW Control	REAPER (VST3)	Studio One (VST3)	Ableton Live (VST3)	Cubase/Nuendo (VST3)	Logic Pro (AU)	Pro Tools (AAX)
DAW Volume and Pan control	✓	✓	✓	✓	✓	-
DAW Track Colour	✓	✓	✓	✓	✓	✓
DAW Sends Control	✓	✓	✓	✓	✓	-
Synchronised DAW Track Selection	✓	✓	✓	✓	✓	✓
DAW Solo and Mute control	✓	✓	✓	✓	✓	✓
Follow DAW Track Ordering	✓	✓	✓	✓	✓	✓
DAW Track Name	✓	✓	✓	✓	✓	✓


Ensure SSL 360° is up-to-date (v2.1.12 and above) in order to benefit from the latest DAW integration features for Logic Pro and Pro Tools.

Enhanced DAW Control	Mixbus 11 and above (VST3)	FL Studio (VST3)	Digital Performer (VST3)	Bitwig Studio (VST3)	LUNA (VST3)
DAW Volume and Pan control	✓	✓	✓	✓	✓
DAW Track Colour	✓	✓	✓	✓	✓
DAW Sends Control	✓	-	✓	✓	✓
Synchronised DAW Track Selection	✓	360 follows FL Studio	✓	✓	✓
DAW Solo and Mute control	✓	✓	✓	✓	✓
Follow DAW Track Ordering	✓	✓	✓	✓	✓
DAW Track Name	✓	✓	✓	✓	✓


Get-Started

Unpacking

The unit has been carefully packed and inside the box you will find the following items in addition to your UC1 control surface:

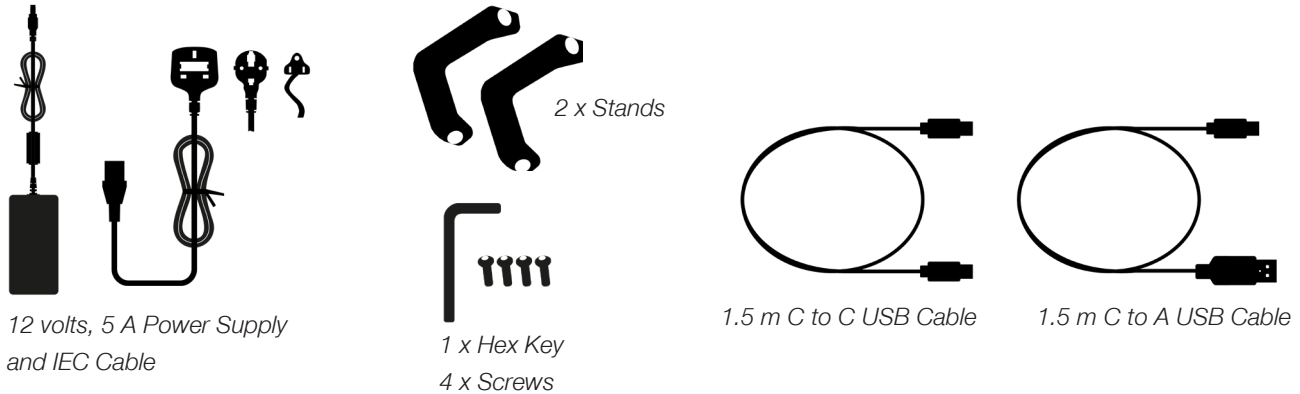

Fitting The Stands (Optional)

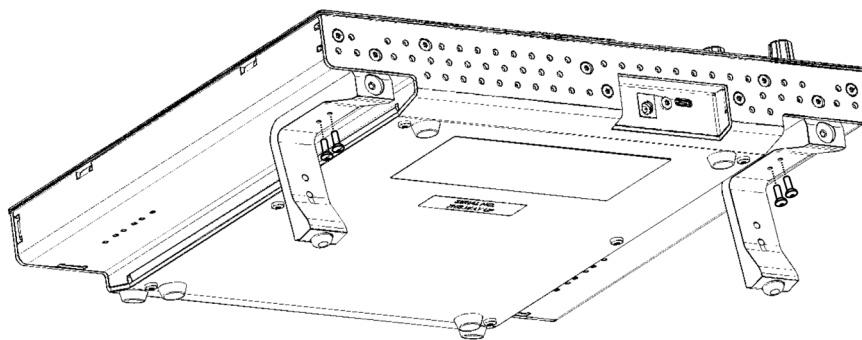


UC1 has been designed to be used with or without the included screw-in stands, depending on your preference. Attaching the included screw-in stands has the added benefit of angling the unit towards you. Three different fixing positions (the holes are arranged in pairs) allow you to choose an angle that is best for your setup. Use 2 screws per stand. **Please be careful not to over-tighten to avoid stripping the screw threads.** For those with a torque measuring device, tighten to 0.5 Nm.


Additional Elevation Angles

If you need a steeper angle of elevation, you can rotate the stands and fix them to the chassis using the shorter side. This gives you three additional angle options to choose from.

1. Unscrew the rubber feet and move to the other end

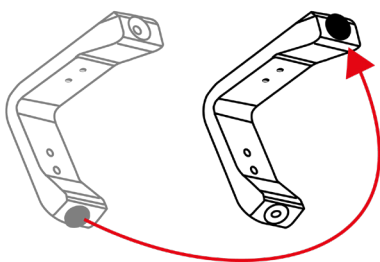

2. Rotate the stands so that the short side fixes to the chassis

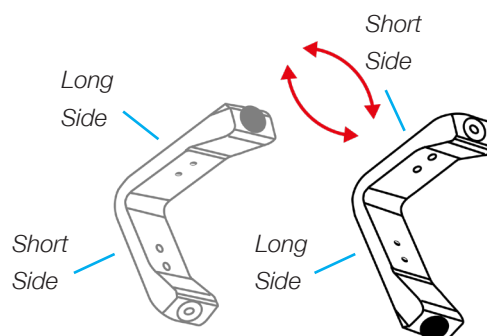

UC1 Physical Specification

Dimensions

11.8 x 10.5 x 2.4 " / 300 x 266 x 61 mm (Width x Depth X Height)

Weight


Unboxed - 2.1 kg / 4.6 lbs

Boxed - 4.5 kg / 9.9 lbs

Safety Notices


Please read the **Important Safety Notices** at the end of this User Guide before use.

Detailed Dimensions

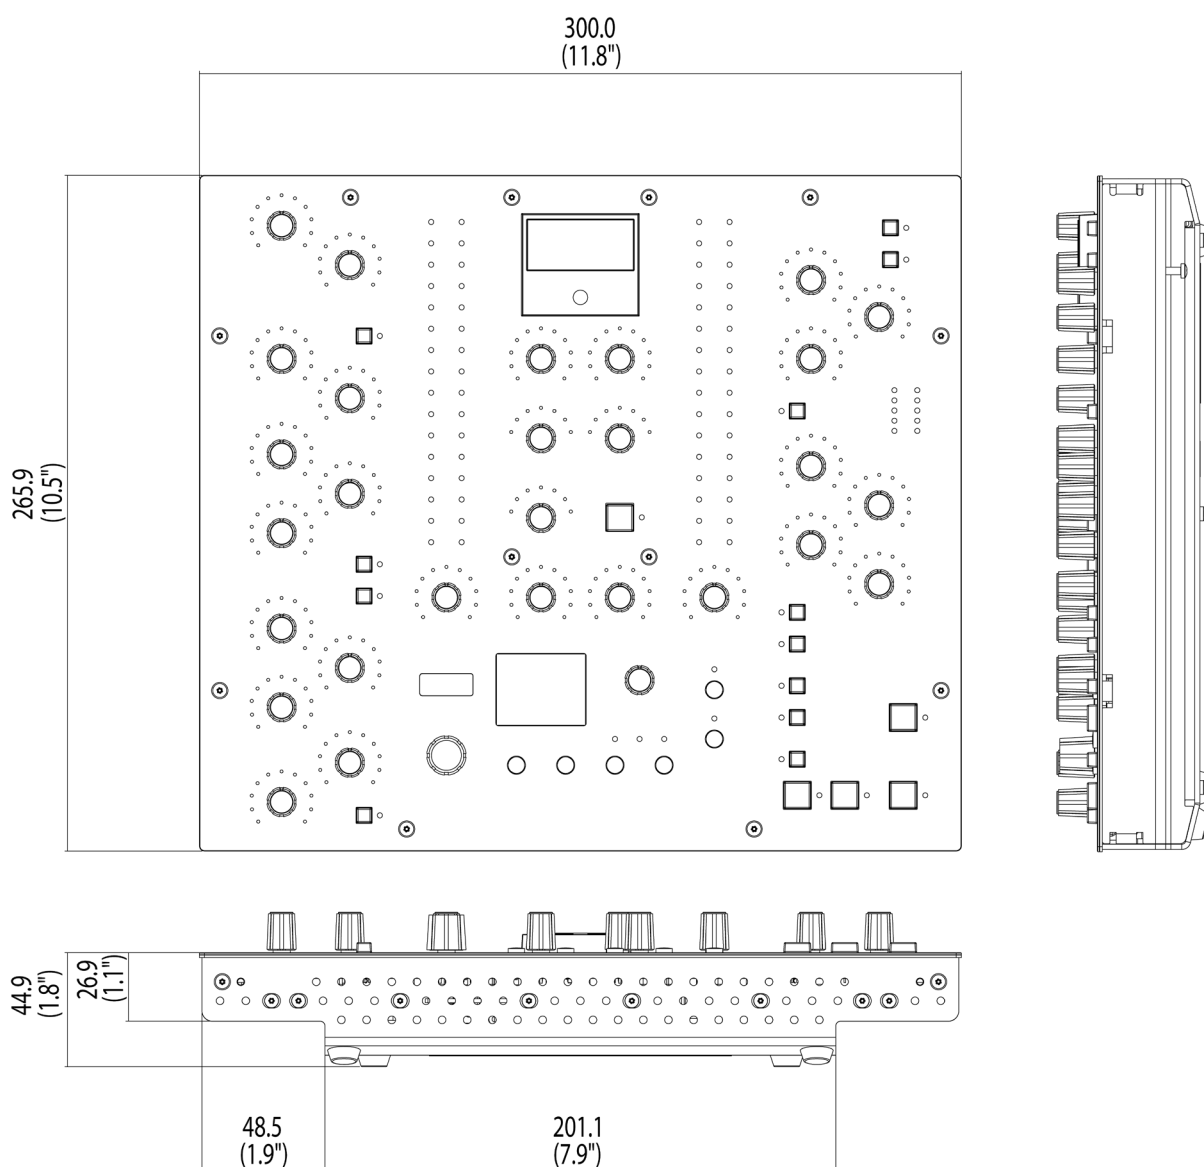

Connecting Your UC1 Hardware

1. Connect the included power supply to the **DC** socket on the connector panel.
2. Connect one of the included USB cables from your computer to the **USB** socket.

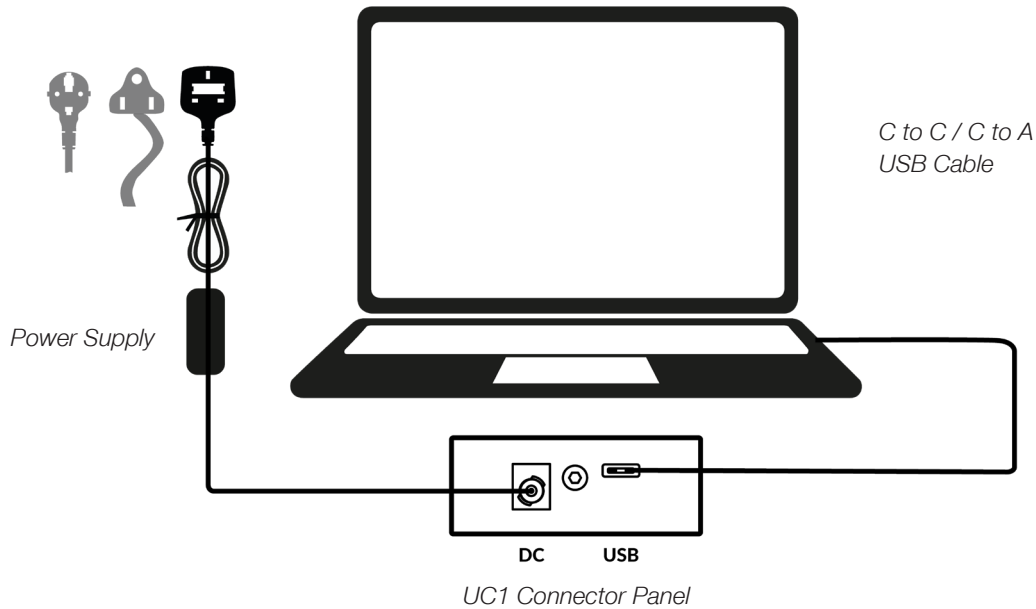

USB Cables

Please use one of the provided USB cables ('C' to 'C' or 'C' to 'A') to connect UC1 to your computer. The type of USB port you have available on your computer will determine which of the two included cables you should use. Newer computers may have 'C' ports, whereas older computers may have 'A'. Please ensure that you are connecting to the port labelled **USB** on UC1, which is a 'C' type connection.

Downloading SSL 360° and 360°-enabled Plug-ins

UC1 requires the SSL 360° software to be installed on your computer in order to function. SSL 360° is the brains behind your UC1 control surface and is also the place to access the 360° Plug-in Mixer. Once you have connected the UC1 hardware to your computer as described on the previous page, please download SSL 360° from the SSL website. Whilst you're on the Downloads page, also download the 360°-enabled plug-ins.



1. Go to www.solidstatelogic.com/support/downloads
2. Click on the link to go to the **SSL Download Manager** page.
3. Download and install SSL Download Manager for your Mac or Windows system.
4. Use SSL Download Manager to install SSL 360° software.
5. Use SSL Download Manager to install 360°-enabled plug-ins and the 360 Link plug-ins.

General System Requirements

Computer operating systems and hardware are constantly changing. Please search for '*UC1 Compatibility*' in our online FAQs to check if your system is currently supported.


Redeeming and Authorising Your Plug-in Licenses

You'll need to register your UC1 hardware in the SSL user portal to claim your plug-in licenses that are included with UC1.

<http://www.solidstatelogic.com/get-started>



To register your UC1, head to www.solidstatelogic.com/get-started and follow the on-screen instructions to create an account or log into your existing one.

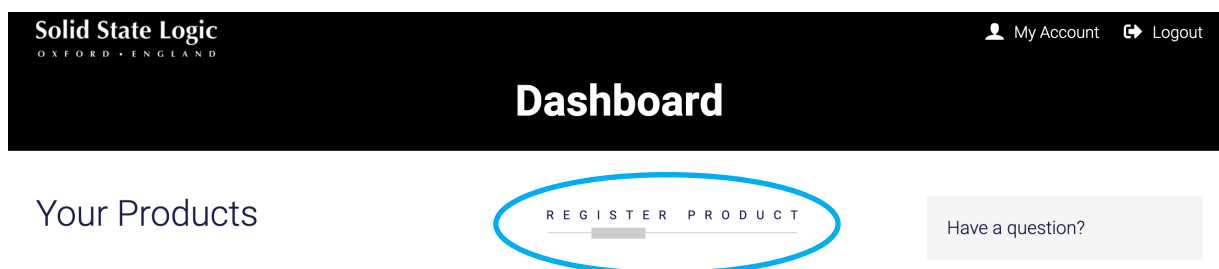


Once logged into your account, click on **REGISTER PRODUCT** on the **Dashboard** page and on the following page choose **REGISTER HARDWARE PRODUCT**.

Choose **SSL UC1** and complete the form.


You will need to input the serial number of your UC1. **This can be found on the label on the base of your UC1 unit** (it is not the number on the packaging box).



For example, **XX-000115-C1D45DCYQ3L4**. The serial number is 20 characters long, containing a mixture of letters and digits.

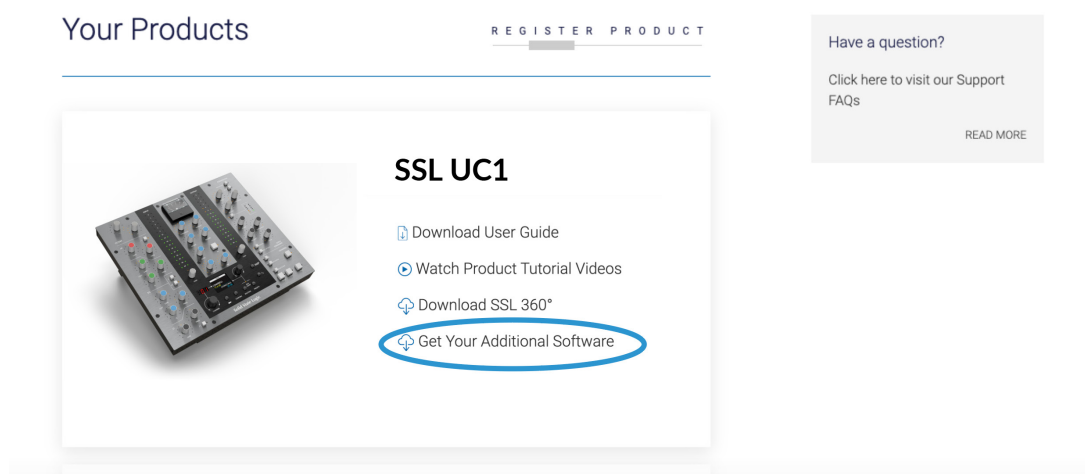


Once you have successfully registered your UC1, it will appear in your Dashboard. Click **Get Your Additional Software**.

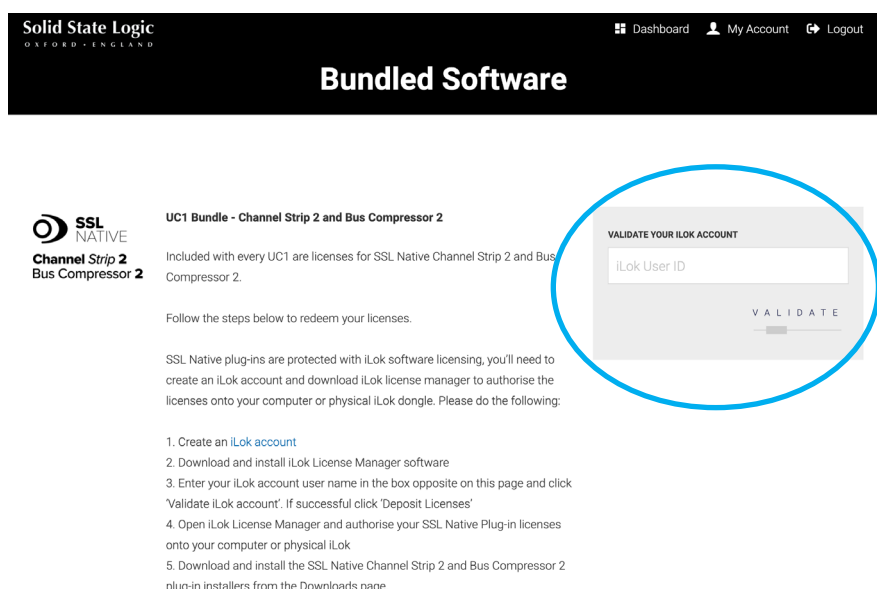

On this page, enter your iLok User ID into the box, wait for your iLok account to be validated and then click **DEPOSIT LICENSES**. Repeat this process for the 4K B entry box that will be underneath the Channel Strip 2 and Bus Compressor 2 box.

Finally, open iLok License Manager, locate the UC1 Channel Strip 2 and Bus Compressor 2 licenses and right-click **Activate** onto your computer or physical iLok.

4K B will appear as a separate license. Locate it in iLok License Manager, then right-click to **Activate** onto your computer or physical iLok.

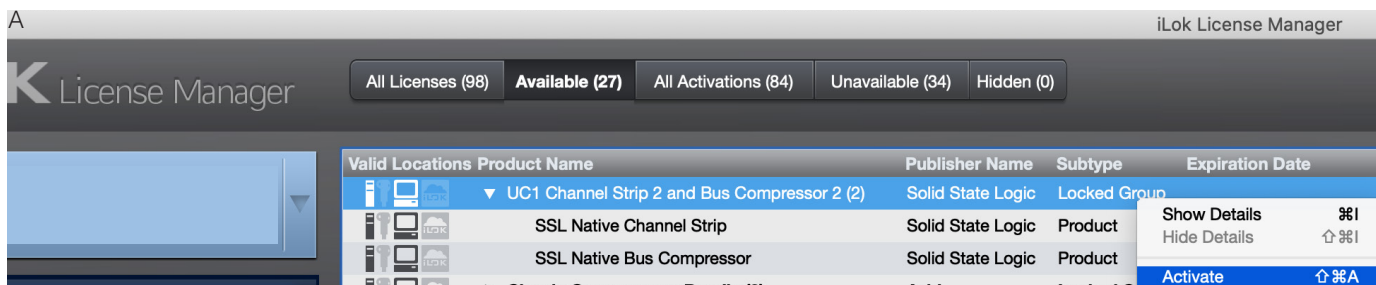

360 Link and 360 Link Bus Compressor (Free)

360 Link and 360 Link Bus Compressor plug-ins are license-free and available to download from SSL Download Manager.

32C, 4K E and 4K G Plug-in Discounts

32C is available to all UC1/UF8/UF1 customers at a discounted price. Please read [this FAQ](#) for more information.


4K E is available to all UC1/UF8/UF1 customers at a discounted price. Please read [this FAQ](#) for more information.

4K G is available to all UC1/UF8/UF1 customers at a discounted price. Please read [this FAQ](#) for more information.

UC1

Front Panel

You can think of UC1 as two plug-in controllers in one, with the left and right hand sides dedicated to controlling 360°-enabled channel strips (or 3rd party plug-ins hosted in 360 Link) and the middle section controlling Bus Compressor 2 (or 3rd party plug-ins hosted in 360 Link Bus Compressor).

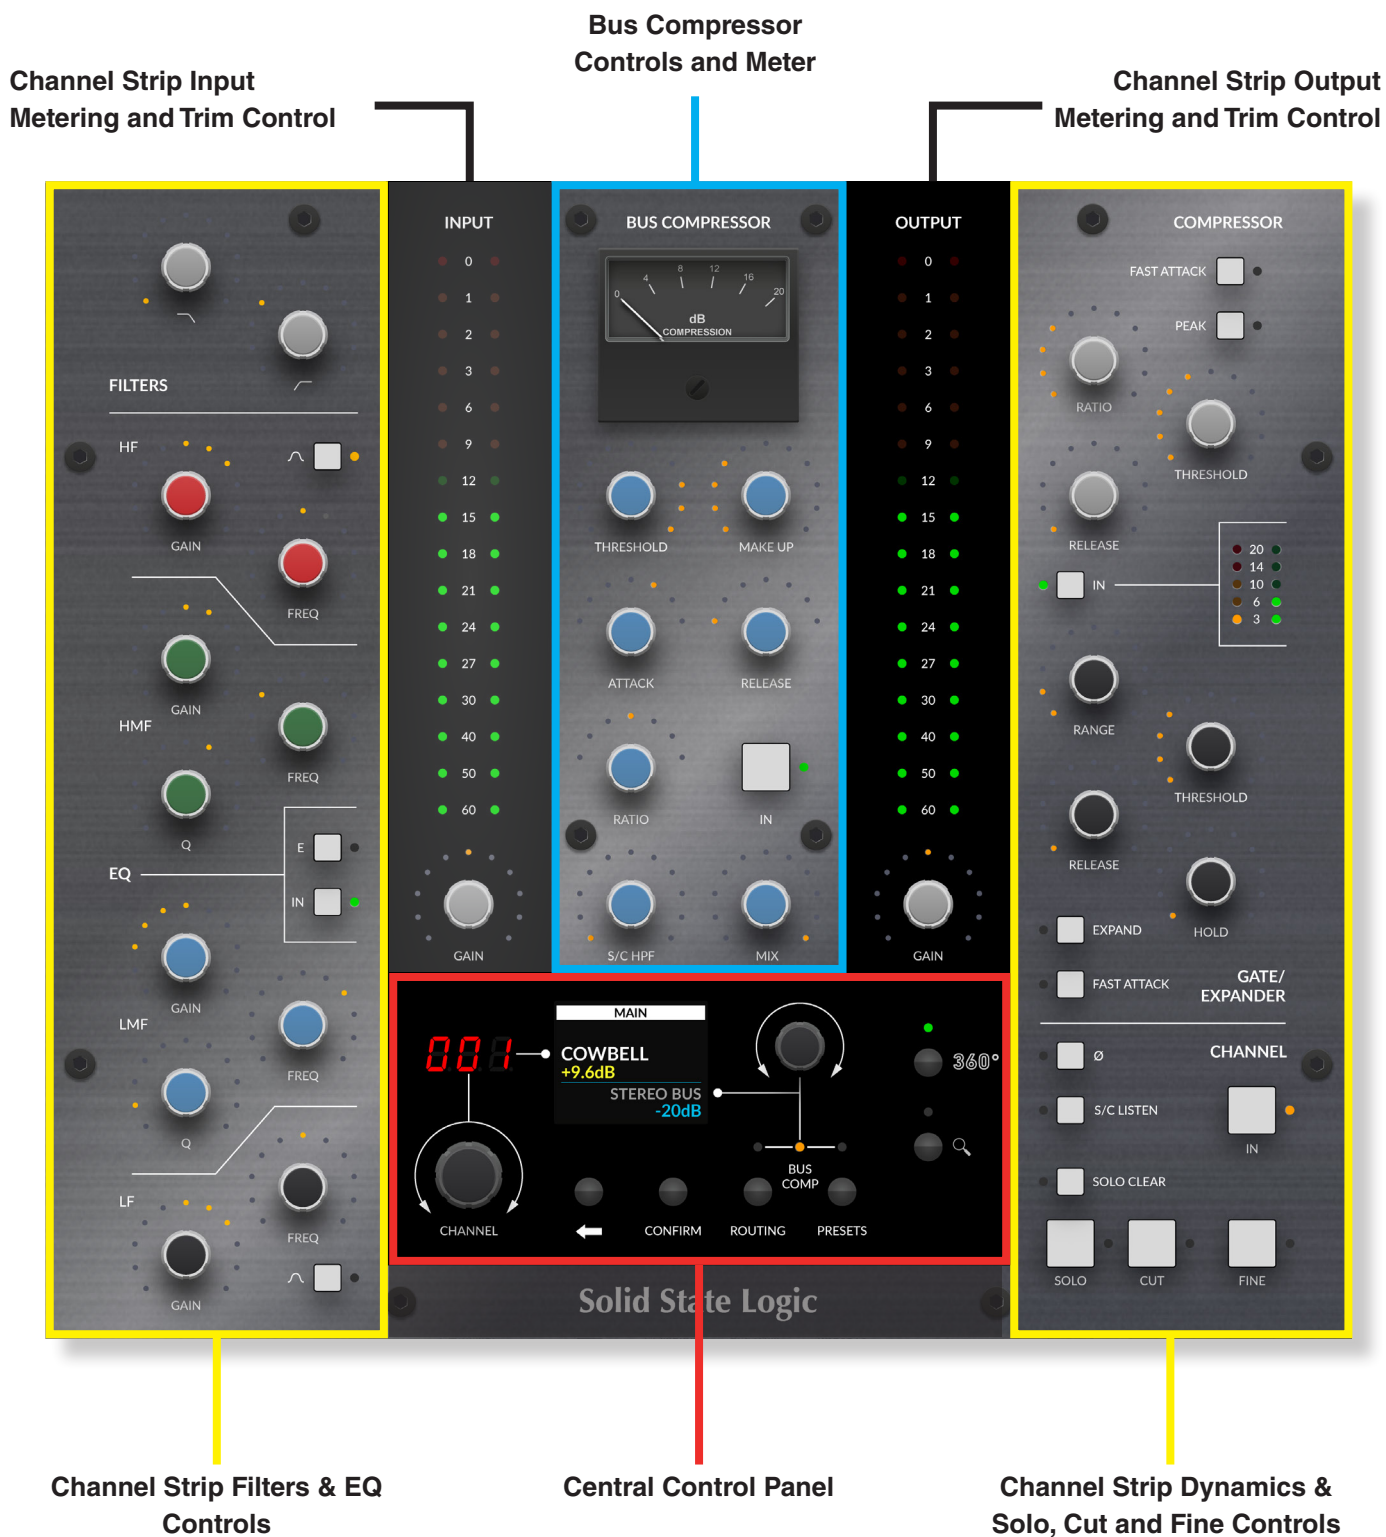

Smart LED Rings

Each channel strip and bus compressor rotary control on UC1 is accompanied by a smart LED ring, which represents the knob position in the plug-in.




Smart LED rings on UC1



Channel strip plug-in controls


The Virtual Notch

Channel strip **GAIN** controls for the EQ bands, Input and Output Trim all have an in-built 'virtual notch'. Although there is no physical difference, the software that drives UC1 helps you to 'feel' your way back to 0 dB - making it easy to flatten an EQ band from the UC1 hardware. The smart LED(s) also dim in this position.




The Channel Strip and Bus Compressor IN Buttons

The large square **IN** buttons on UC1 control the DAW's Bypass function for that channel strip and bus compressor instance. i.e. when they are switched out, the plug-in is bypassed. Bypassing the channel strip, bus compressor or even just the EQ/Dynamics section will also cause the LEDs on UC1 to dim, to help identify the bypassed state. Dimming does not apply for 360 Link-hosted plug-ins.

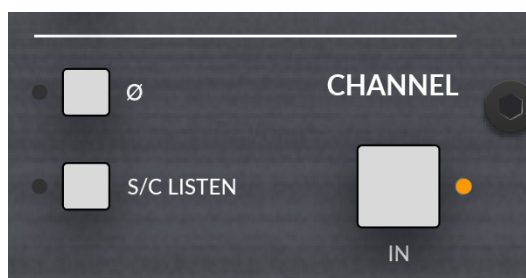

Channel Strip IN controls plug-in Bypass

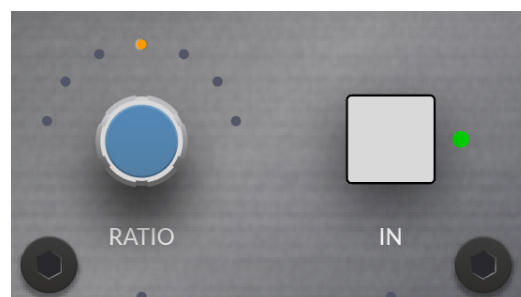


Bus Compressor IN controls plug-in Bypass

Channel Strip Dynamics Metering

Two vertical arrays of five LEDs on the right-hand side show the compression and gate activity for the selected channel strip plug-in on the UC1 front panel.

Some compatible 3rd party plug-ins hosted 360 Link are also able to represent their gain reduction metering on UC1.

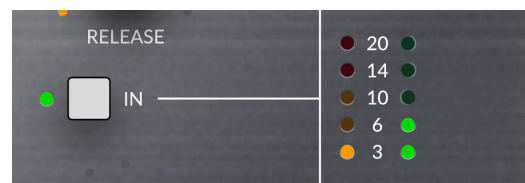

Channel strip Dynamics activity is shown on the right-hand side of UC1

Bus Compressor Meter


The most striking aspect of the UC1 front panel is the inclusion of a genuine moving-coil gain reduction meter. This shows the gain reduction activity of the selected Bus Compressor 2 plug-in. The meter is driven digitally from the plug-in and provides a helpful way of being able to keep an eye on compression activity, even with the Plug-in GUI closed. Some compatible 3rd party plug-ins hosted in 360 Link Bus Compressor are also able to show their gain reduction metering on the meter too.



The Bus Compressor meter

Output GAIN control

Controls the output fader of the 360°-enabled channel strip plug-in, or, the DAW fader (DAW fader control not possible with Pro Tools). With 360°-Link you can assign any 3rd party plug-in parameter to this control. You can choose between Plug-in or DAW control using the **PLUG-IN** parameter (on/off) in the Extended Functions menu on UC1. Or you can change the parameter using the PLUG-IN and DAW fader buttons in the Plug-in Mixer.




SOLO and CUT Buttons

The **SOLO** and **CUT** buttons apply to the channel strip instance being controlled by UC1.

In most cases, the **SOLO** and **CUT** buttons directly control the DAW's Solo and Mute buttons. In others, the soloing system is independent.

SOLO CLEAR

Clears any active Channel Strip solos.

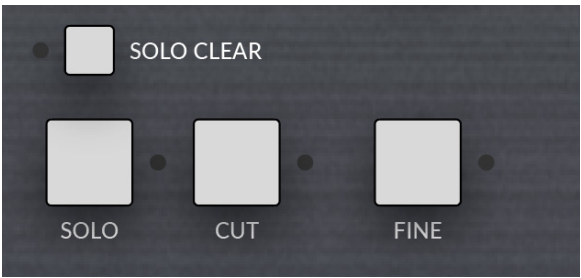

SOLO, CUT and FINE controls in the bottom-right of UC1

FINE - puts all front panel channel strip and bus compressor rotary controls into a finer resolution, for mix critical tweaks. This can be latched or held for a momentary action.

SOLO AND CUT linked to DAW	SOLO AND CUT independent of DAW
Pro Tools* (SSL 360 v2.1 and above) Logic Pro (SSL 360 v2.1 and above) Live Studio One REAPER Cubase/Nuendo LUNA Bitwig Studio Digital Performer FL Studio Mixbus 11 and above	Pro Tools (SSL 360 v2.0 and below) Logic Pro (SSL 360 v2.0 and below)

*Also requires Pro Tools 2025/2026 and above.


Control of Harrison 32Classic Channel Strip Variable Attack Time Parameter

As of SSL 360° v2.1.12, the Harrison 32Classic Channel Strip v2 plug-in is natively controllable from UC1.

32C differs from SSL channel strips, in that it has continuously variable Compressor and Gate/Expander Attack controls.


On UC1, you can hi-jack the **RATIO** control, and instead have it control the Compressor Attack time by pressing the **FAST ATTACK** button.

Similarly, you can hi-jack the **RANGE** control, and instead have it control the Gate/Expander Attack time by pressing the **FAST ATTACK** button.

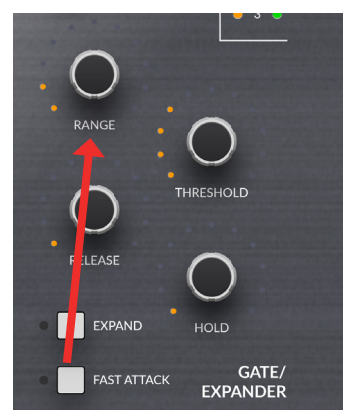

Central Control Panel

The Central Control Panel of UC1 is used to perform a number of key functions relating to the plug-ins and the Plug-in Mixer.

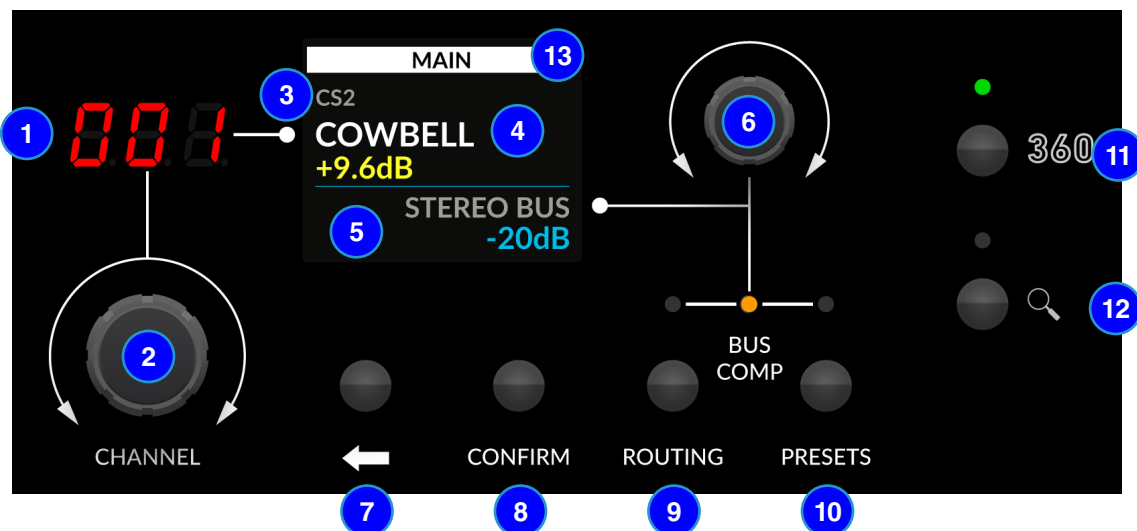

1 - 7-Segment Display

Displays the position of the selected channel strip plug-in in the **Plug-in Mixer**.

2 - CHANNEL Encoder

Changes the selected channel strip plug-in being controlled by UC1.

3 - Channel Strip Model / 3rd Party Plug-in Hosted in 360 Link

Displays the 360°-enabled channel strip model or 3rd party plug-in hosted in 360°-Link, being controlled by UC1.

4 - Channel Strip Name

Displays the name of the DAW track the channel strip or 360 Link plug-in is inserted on in the DAW. Immediately below, a value readout is temporarily displayed whilst a channel strip control is being adjusted.

5 - Bus Compressor Name

Displays the name of the DAW track the Bus Compressor 2 or 360 Link Bus Compressor plug-in is inserted on in the DAW. Immediately below, a value readout is temporarily displayed whilst a bus compressor control is being adjusted.

6 - Secondary Encoder

By default this control changes the selected bus compressor but it can also be used to change the process order for channel strip (**ROUTING**), select **PRESETS** or navigate the DAW's playhead cursor when in **TRANSPORT** mode (accessed by pushing the encoder from Bus Comp mode). **TRANSPORT** mode requires HUI/MCU setup, detailed in this User Guide.

7 - BACK Button

From the **MAIN** screen, pushing the back button will take you to the **EXTENDED FUNCTIONS** menu for channel strips.

Otherwise, it is used to navigate back up through the **PRESETS** list or, when in **TRANSPORT** mode, this functions as the Stop command.

8 - CONFIRM Button

When in the **EXTENDED FUNCTIONS** menu, can be used to confirm the parameter selection. Also used to navigate forward through the **PRESETS** list or confirms preset loading. When in **TRANSPORT** mode, this functions as the Play command.

9 - **ROUTING** Button

Allows the **Secondary Encoder** to change the processing routing order of the selected channel strip plug-in (native 360°-enabled channel strip plug-ins only).

10 - **PRESETS** Button

Allows the **Secondary Encoder** to load a preset for the selected channel strip or Bus Compressor 2 plug-in (native 360°-enabled plug-ins only).

11 - **360°** Button

Opens/minimises the SSL 360° software on your computer screen.


12 - **Zoom** Button

Toggles the bus compressor sidebar of the **Plug-in Mixer**.

13 - In compatible DAWs, the top area of the display will reflect the DAW track colour.

Extended Functions Menu


From the **MAIN** screen, pushing the **BACK** button will take you to the **EXTENDED FUNCTIONS** menu for channel strips. This menu hosts any additional parameters of the selected channel strip plug-in such as Compressor Mix, Pre In/Out, Mic Gain, Pan, Width, Output Trim and Solo Safe (exact list depends on the parameters of that particular 360°-enabled channel strip plug-in). Quick Controls for 360°-Link hosted plug-ins are also found in here. Furthermore, the **EXTENDED FUNCTIONS** menu also includes the option to switch the Output Gain control between the plug-in's own fader and the DAW in compatible VST3 DAWs.

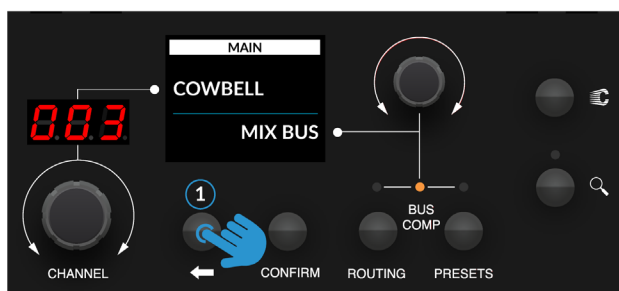

1 - Main Menu - Press Back Arrow to enter (or exit) the Extended Functions Menu Screen



2 - Turn Secondary Encoder to move through list of functions

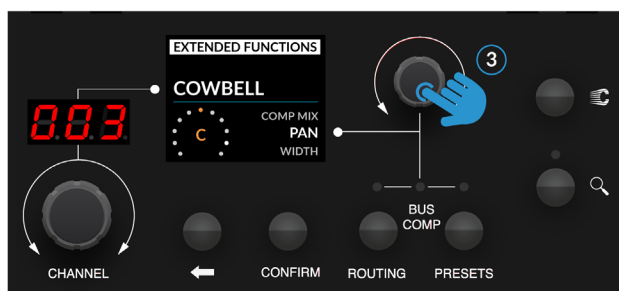

3 - Press Secondary Encoder to select function from the list to adjust



4 - Turn Secondary Encoder to adjust selected function.
Press encoder to go back to scrolling Extended Functions Parameter List

Don't forget, that you can use the **FINE** button to increase the resolution of control when adjusting any Extended Functions parameter.



Process Order Routing


You can adjust the process order routing for the selected native 360°-enabled SSL channel strip plug-in by pressing the **ROUTING** key and then turning the secondary encoder.

There are 10 possible routing orders, as shown in the table below. Each routing order has a 'b' equivalent, which sources the Dynamics sidechain externally.

Processing Order Options

1. Filters > EQ > Dynamics (Default)
2. EQ > Filters > Dynamics
3. Dynamics > EQ > Filters
4. Filters > Dynamics > EQ
5. Filters > Dynamics > EQ (with Filters to DYN S/C)
6. Filters > EQ > Dynamics (with EQ to DYN S/C)
7. Filters > EQ > Dynamics (with Filters to DYN S/C)
8. EQ > Filters > Dynamics (with EQ and Filters to DYN S/C)
9. EQ > Filters > Dynamics (with EQ to DYN S/C)
10. EQ > Dynamics > Filters (with DYN and Filters to DYN S/C)

To return the secondary encoder to controlling the selected bus Compressor, simply press the **ROUTING** key again.

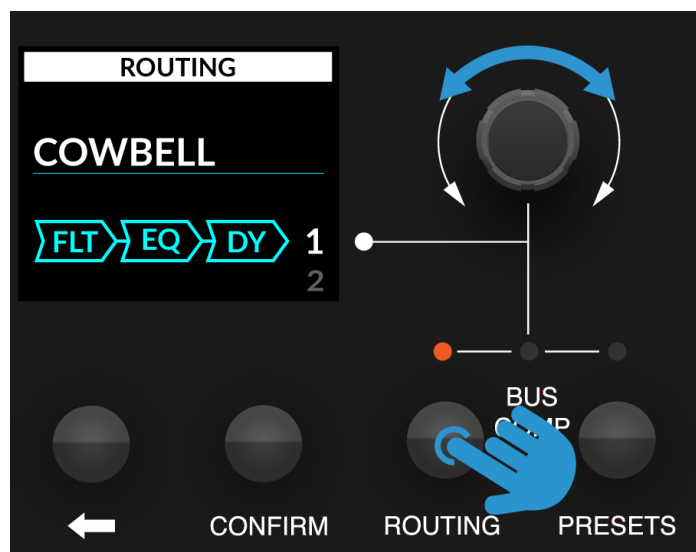

Press **ROUTING** then use the secondary encoder to select the process ordering for the selected channel strip plug-in




'b' equivalent - the top line going into Dynamics means that the Dynamics sidechain is set to EXTERNAL


360°-Link hosted plug-ins do not support the **ROUTING** or **PRESETS** menu

Presets

You can load presets for the selected native 360°-enabled channel strip or Bus Compressor 2 plug-in directly from the surface by pressing the **PRESETS** key. Turn the secondary encoder to choose if you want to load a preset for the selected channel strip or Bus Compressor and confirm by either pushing the secondary encoder, or pressing the **CONFIRM** button. Then use the secondary encoder to scroll through the list of presets. Pushing will either confirm the current preset (it turns green), or it will enter you into a preset folder. Use the **BACK ARROW** key to navigate back up through preset folders. Press **PRESETS** once more to return the secondary encoder to controlling Bus compressor selection.

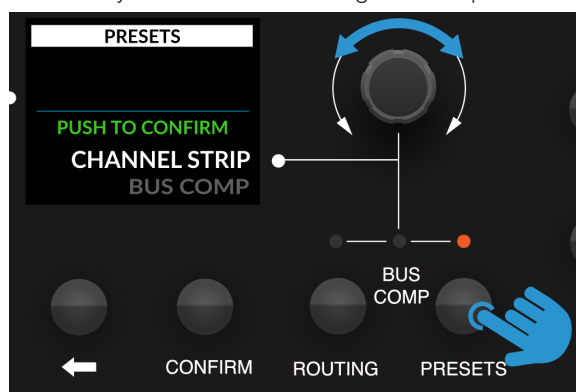

Press the **PRESETS** key and then choose channel strip or Bus Compressor

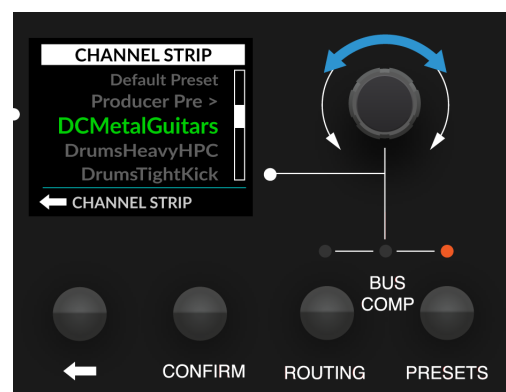


Navigate through your presets list using the secondary encoder and push to load

Transport

You can control the DAW's Play and Stop commands, as well as the playhead cursor from the front panel of UC1. The Transport functionality from UC1/Plug-in Mixer is achieved using HUI/MCU commands. In order for this to function, you must configure a HUI/MCU controller in your DAW, as well as configuring which DAW is driving the Transport in the **CONTROL SETUP** tab of SSL 360°.


Please follow the instructions in the [Plug-in Mixer Transport Setup](#) section if you want to use **TRANSPORT Mode on UC1**.

- 1 - Ensure you are in Bus Comp mode and then simply press the **Secondary Encoder** to enter/exit **TRANSPORT** mode.
- 2 - Turning the Secondary Encoder will allow you to navigate the playhead cursor forwards/backwards along the DAW's timeline.
- 3 - The **BACK** button becomes the STOP command.
- 4 - The **CONFIRM** button becomes the PLAY command.

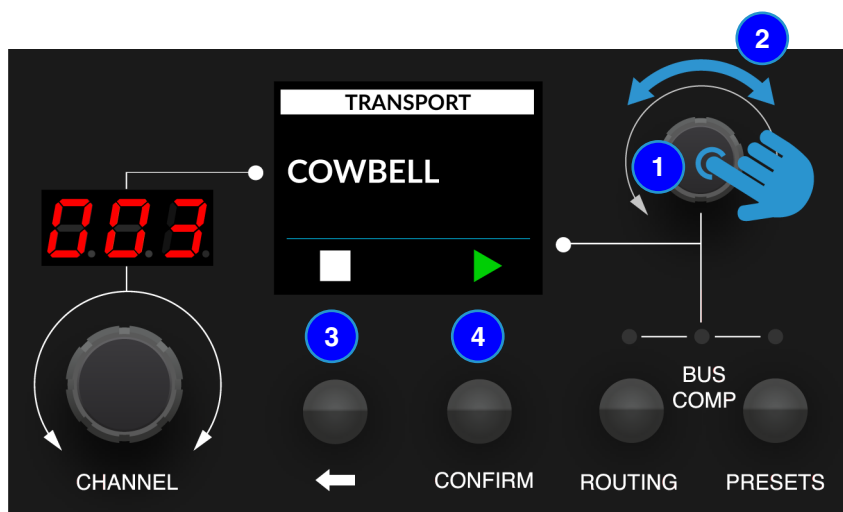

Connector Panel

The recessed section hosts UC1's connectors.

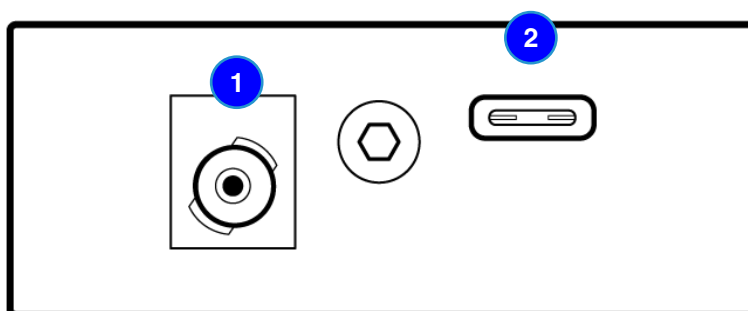

1 - DC Connector

Use the included DC Power Supply to provide power for your UC1.

2 - USB - 'C' Type Connector

Connect one of the included USB cables from your computer to the **USB** port on UC1. This handles all of the communication between the plug-ins and UC1, via the SSL 360° software application.

UC1/360°-Enabled Channel Strip Plug-ins

Below are the channel strip plug-ins that currently integrate with UC1 and the SSL 360° Plug-in Mixer.

SSL Channel Strip 2

Included with UC1

In-depth [User Guide](#) available on the SSL Support Site.

Channel Strip 2 is a fully-featured channel strip, based on digital modelling of the EQ and Dynamics curves from the legendary XL 9000 K SuperAnalogue console. Clean, linear tone shaping for maximum flexibility. Switch between classic E and G-Series EQ curves.

The V2 update adds:

- Re-designed GUI
- HQ Mode - Intelligent Oversampling
- Output Fader
- Width and Pan Controls for Stereo Instances



SSL 4K B

Included with UC1

In-depth [User Guide](#) available on the SSL Support Site.

The 4K B is a detailed model of the legendary SL 4000 B channel strip. The SL 4000 B was the first ever commercially released SSL console and responsible for the sound of many classic records that came out of London's famous Townhouse Studio 2, 'The Stone Room'.

- Full of tone, punch and rich non-linear analogue character
- Add analogue saturation and drive to your tracks with the pre-amp section and VCA fader saturation
- Original 4000-series EQ circuit, the precursor to the O2 Brown Knob EQ of the 4000 E
- B-Series channel compressor, featuring a circuit topology that is based on the SSL Bus Compressor – peak detection and a sidechain VCA in a feedback loop
- Unique 'ds' mode re-purposes the compressor to be a de-esser.



SSL 4K E

4K E is available to all UC1/UF8/UF1 customers at a discounted price. Please read [this FAQ](#) for more information.

In-depth [User Guide](#) available on the SSL Support Site.

The 4K E Plug-in is the definitive software emulation of the 4000E console channel strip, authentically recreating the sound, processing and workflow of one of the most highly regarded and influential music production tools in history. Released in 1979, the 4000E console played a pivotal role in reshaping the way music was made. Its big, punchy sound, advanced processing tools and ground-breaking flexibility meant it quickly became the tool of choice for the world's top studios.

- The sought after signature SSL sound; the sound of hit-records
- Jensen JT-115K-E mic pre with adjustable saturation
- Choose between Brown, Black and the rare 'passive-style' Orange EQ flavours
- Revision 4 Dynamics – the classic Soft-knee and logarithmic release circuit
- DBX 202 'Gold Can' VCA fader modelling



SSL 4K G

4K G is available to all UC1/UF8/UF1 customers at a discounted price. Please read [this FAQ](#) for more information.

In-depth [User Guide](#) available on the SSL Support Site.

Building on the success of the 4000 E, the 4000 G debuted at the 1987 AES Convention in New York and soon earned its reputation as the ultimate mixing console. With a redesigned Pink Knob '292' EQ, multiple circuit refinements and a powerful yet intuitive automation system, the G-Series console had an unmatched sound, coupled with a superior creative workflow.

- Authentic model of the 4000 G; the console that defined the sounds of a generation
- Jensen JT-115K-E mic pre with adjustable saturation
- Variable Mic Input Impedance Control from the classic FX383 G-Series outboard unit
- Choose between 4000 G-Series Pink 292 and Black 242 EQ flavours
- 4000 G-Series Dynamics modelling
- THAT 2002T 'Blue Can' VCA fader modelling



Harrison 32Classic Channel Strip v2

32C is available to all UC1/UF8/UF1 customers at a discounted price. Please read [this FAQ](#) for more information.

In-depth [User Guide](#) available on the SSL Support Site.

The 32 Series console helped create some of the most influential music ever made and now with the 32Classic plug-in, you can access the sound and workflow in your DAW that engineers like Bruce Swedien, Roger Nichols, and Reinhold Mack trusted to make music that stands the test of time.

- Legendary ultra-wide Harrison HP & LP filters
- DRIVE control for dialing in warm, harmonic saturation, based on the Jensen JT-MB-CPCA transformer coupled mic pre
- Fully-featured compressor, with three compression types: COMP, LEVEL & LIMIT modes
- Fully-featured Gate/Expander for taming live tracks or adding more dynamic articulation
- Versatile classic four-band parametric EQ with proportional Q



SSL 360 Link

The 360 Link plug-in is license-free and available to download via SSL Download Manager.

SSL 360 Link brings a new level of power and flexibility to your hybrid SSL workflow by allowing effortless control of any third-party plug-in using the UC1/UF8/UF1 hardware.

In-depth [User Guide](#) available on the SSL Support Site or watch our 360 Link tutorial videos on the SSLVideos channel. Both include details on mapping your 3rd party plug-ins to UC1's channel strip controls.

- Control any 3rd party plug-in with the UC1 channel strip controls.
- Choose from a selection of editable factory control maps for Slate Digital®, Universal Audio®, Waves®, Brainworx® and Harrison Audio® plug-ins.
- Customise your mixing experience by creating control maps for any plug-in.
- Optimize workflow efficiency by centralizing control within the SSL 360° ecosystem.
- Insert empty 360 Link plug-ins on every channel as an efficient way of adding VST3 DAW control (pan, fader, track colours, sends etc) for UC1/UF1/UF8. Compatible VST3 based DAWs only.



Channel Strip Plug-in User Guides

For in-depth information on all features of the channel strip plug-ins, please refer to the individual [plug-in user guides](#) on the SSL Support Site. This User Guide focuses on UC1 and Plug-in Mixer integration with the channel strip plug-ins.

Plug-in Mixer Number, Track Name and 360° Button

The 3-digit number in red tells you the position that the channel strip plug-in has been assigned to in the 360° Plug-in Mixer. To the right of this is the name of the DAW track the plug-in is inserted on - e.g. 'LEADVOX'. The button labelled **360°** opens the SSL 360° on the Plug-in Mixer page (presuming SSL 360° is installed). Otherwise, it will take you to the SSL website.



SOLO, CUT & SOLO CLEAR

In most cases, the **SOLO** and **CUT** buttons directly control the DAW's Solo and Mute buttons. In others, the soloing system is independent.

SOLO AND CUT linked to DAW	SOLO AND CUT independent of DAW
Pro Tools* (SSL 360 v2.1 and above) Logic Pro (SSL 360 v2.1 and above) Live Studio One REAPER Cubase/Nuendo LUNA Bitwig Studio Digital Performer FL Studio Mixbus 11 and above	Pro Tools (SSL 360 v2.0 and below) Logic Pro (SSL 360 v2.0 and below)

**Also requires Pro Tools 2025/2026 and above.*

For DAWs whereby the **SOLO** and **CUT** integration *is independent (not linked to the DAW)*, this is how it works:

SOLO - Cuts the output of all other channel strip plug-ins in the session.


CUT - Cuts the output of the channel strip plug-in.

SOLO CLEAR - Clears any active Channel Strip solos.

(SOLO) SAFE - Prevents the plug-in from being cut in response to another channel strip in the session having its **SOLO** activated. Useful for when channel strips are inserted onto Aux/Bus tracks within the session.

Solo Safe functionality is only available for:

- Pro Tools and Logic Pro but only when running SSL 360 v2.0 and below (where solos and cuts are not linked to the DAW).
- Cubase/Nuendo - it links directly to the Solo Defeat button of the Cubase/Nuendo DAW Track.




Recommended workflow when **SOLO** and **CUT** are independent of DAW:

1. Insert a 360°-enabled channel strip plug-in on all tracks in your DAW session.
2. Make sure to engage the **SOLO SAFE** button on channel strips that have been inserted onto Auxes/Busses/Sub Groups/Sub Mixes. This will ensure that you hear individual instruments that are routed to these destinations when you start soloing.

SOLO SAFE prevents a channel strip from being cut when another channel strip's SOLO is activated.

Version Number

In the bottom-right of the plug-in GUI, the version is displayed e.g. 2.0.27 This is important to pay attention to because SSL 360° releases will often require a certain version of plug-in to be installed in order for the system to function correctly. Please check the [SSL 360° Release Notes](#) article on the SSL knowledge base to check you are running compatible versions.



UC1/360°-Enabled Bus Compressor Plug-ins

Bus Compressor 2

The Bus Compressor 2 plug-in is based on the legendary centre section bus compressor found on SSL's large format analogue consoles. It provides high quality stereo compression for critical control over the dynamic range of audio signals.

The compressor can be used for practically any application that requires superior compression. For example, place it over a stereo mix to 'glue' the mix together whilst still maintaining a big sound, or use it on drum overheads or whole drum kits for highly effective control of drum dynamics.



360 Link Bus Compressor

The 360 Link Bus Compressor plug-in is license-free and available to download via SSL Download Manager.

SSL 360 Link Bus Compressor brings a new level of power and flexibility to your hybrid SSL workflow by allowing effortless control of any third-party plug-in using the UC1/UF8 hardware.

In-depth user guide available on the SSL Support Site or watch our 360 Link tutorial videos on the SSLVideos channel. Both include details on mapping your 3rd party plug-ins to UC1's bus compressor controls.


- Control any 3rd party plug-in with the UC1 bus compressor controls.
- Choose from a selection of editable factory control maps for Slate Digital®, Universal Audio®, Waves® and Brainworx® plug-ins.
- Customise your mixing experience by creating control maps for any plug-in.
- Optimize workflow efficiency by centralizing control within the SSL 360° ecosystem.



SSL 360° Software

Home Page

SSL 360° software is not only the 'brains' behind the UC1 control surface, it is also the command centre from which new versions of software and firmware can be downloaded for your 360° compatible device. Importantly for UC1, SSL 360° hosts the Plug-in Mixer page.

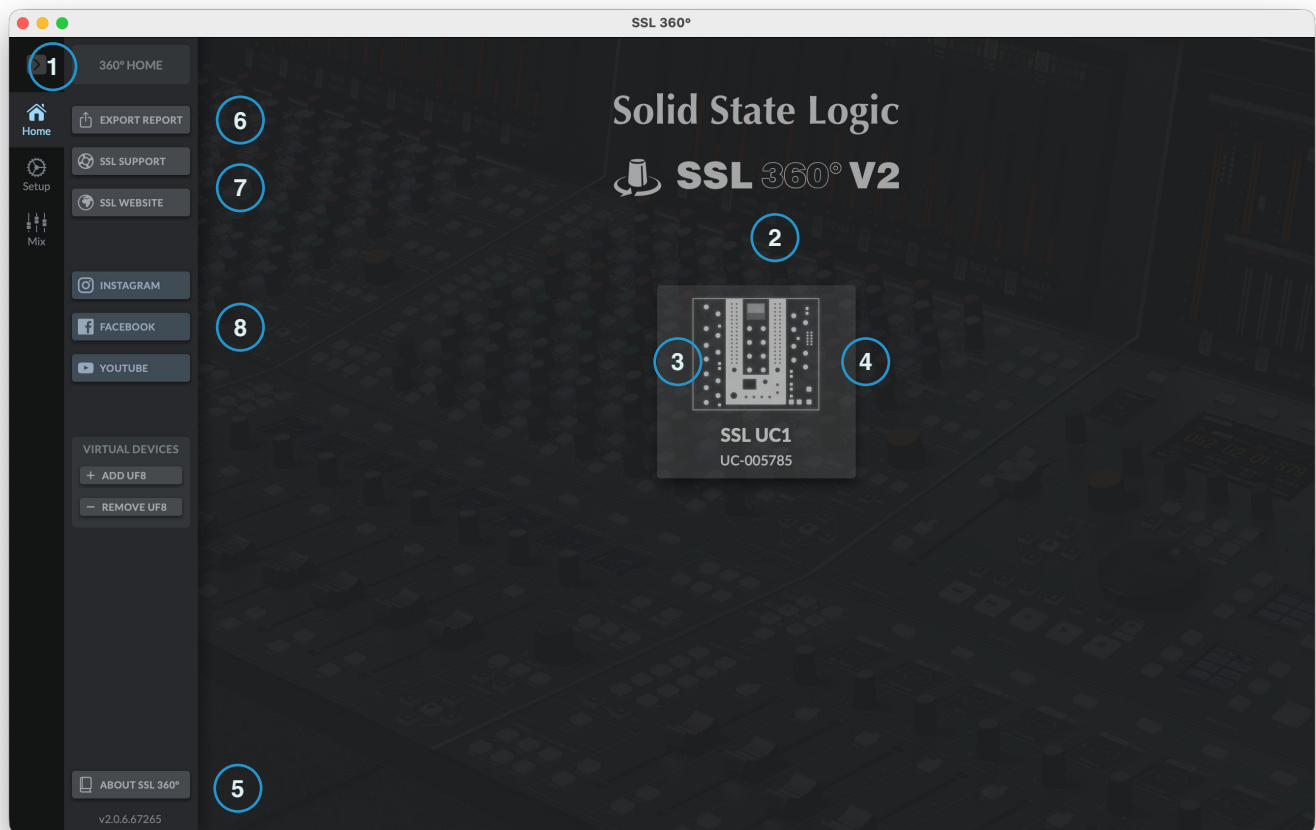

The **HOME** screen:

1 - Menu Toolbar

This toolbar allows you to navigate through the various pages of SSL 360°.

2 - Software Updates Area

When software updates become available, an **Update Software** button will appear here (not shown in the image above). Click this to download and update your software.

3 - Connected Units

This area shows any 360°-enabled devices that are connected to your computer, along with their respective serial numbers. **Please allow 5-10 seconds for units to be discovered once they are plugged in.**

If your unit(s) are not showing up, try unplugging and re-plugging the USB cable from the port on your computer.

4a - Firmware Updates Area

If a firmware update becomes available for your UC1 unit, an **Update Firmware** button will appear on top of the UC1 icon (not shown in the image). If present, click on the button to start the firmware update process, being sure to not disconnect the power or USB cable(s) whilst it is in progress.



4b - UC1 Bus Compressor Meter Calibration

Providing your UC1 firmware is up-to-date, you can hover over the UC1 icon and click '**Calibrate VU-Meter**' to access the Meter Calibration tool.

This tool will enable you to (if necessary) calibrate the physical bus compressor meter, so that it closely matches the Bus Compressor 2 plug-in.

For each calibration marking use the **-** and **+** buttons to move the bus compressor meter on the UC1 hardware, until it lines up closely with the marking.

The calibration is saved automatically onto the UC1 hardware.

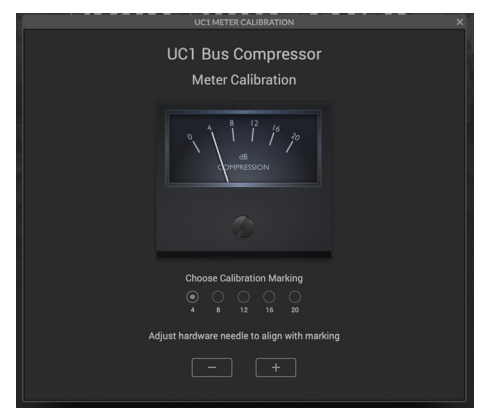

5 - About & SSL 360° Software Version Number

Clicking this will open a pop-up window detailing software licensing relating to SSL 360°.

The area below the About button displays the version number of SSL 360° that is running on your computer. Clicking on the version text will take you to the Release Notes information on the SSL website.

6 - Export Report

Should you encounter any issues with your SSL 360° software or control surfaces, you may be asked by a support agent to use the **EXPORT REPORT** feature. This feature generates a text file containing essential information about your computer system and UF8(s)/UC1, alongside technical log files relating to SSL 360° activity, which may help to diagnose any issues. When you click **EXPORT REPORT**, you'll be asked to choose a destination on your computer to export the generated .zip file to, which you can then forward on to the support agent.

7 - SSL Support and Website

Links to the SSL Support pages and SSL website.

8 - SSL Socials

Links to SSL Facebook, Instagram and YouTube pages.


Control Setup Page

This is accessed via the settings cog icon on the left-hand side toolbar in 360°.


Plug-in Mixer Transport & Hybrid Mode Setup

Determines which DAW drives the Plug-in Mixer Transport control, Virtual Soft Keys and Automation Buttons (compatible DAWs only) via HUI/MCU.

It also determines which DAW's HUI/MCU commands are available across the 8 x Virtual Soft Keys in the Plug-in Mixer page.

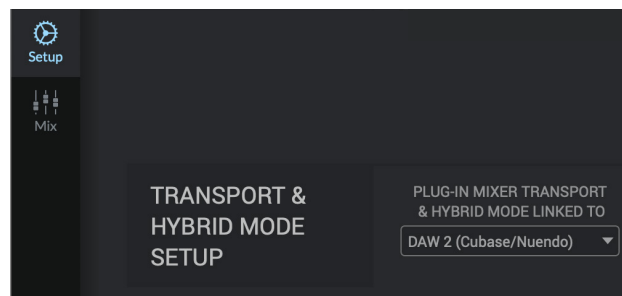

Please read the [Transport Control & Hybrid Mode Setup](#) section for more information on configuring this.

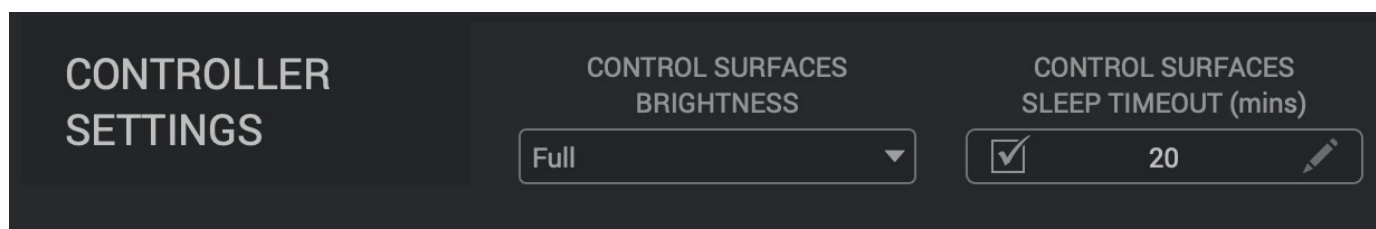

Controller Settings

CONTROL SURFACES BRIGHTNESS

Choose from 5 different brightness options for your connected 360°-enabled controllers (UF8/UF1/UC1). The brightness adjusts both the displays and buttons. This is useful for dark studio environments, where the default 'Full' settings might be too bright.

CONTROL SURFACES SLEEP TIMEOUT (mins)

Determines the length of time before your connected 360° control surfaces go into Sleep mode. Simply type a number between 1 and 99. To force a control surface out of sleep mode, press any button or move any control on the surface itself. You can untick the box to disable Sleep mode.

Logic Pro Enhanced DAW Control Integration

Features

As of SSL 360 v2.1.12, UC1/360° Plug-in Mixer has enhanced DAW integration with UC1 via OSC. These features include:

- Synchronised Track Selection with Logic Pro
- Track Colours from Logic Pro
- Solo and Mute linked directly to Logic Pro tracks
- Control of Logic Pro Volume Faders and Pans
- Control of up to 8 sends per track (UF8 set to the Plug-in Mixer Layer only).

Installation



- Ensure SSL 360° has been updated to v2.1.12 or higher
- Update your UC1 (and UF8 and UF1) controller firmware via the HOME page of the SSL 360° application.
- Ensure all your SSL 360°-enabled plug-ins are updated SSL Download Manager, so that they are on the latest versions (and therefore compatible with SSL 360° v2.1.12).

Logic Pro Version

- Ensure you are running Logic Pro 12.
- These new integration features were developed and tested using Logic Pro 12. We cannot guarantee compatibility with previous versions, although these features should work with later versions of Logic Pro 11 - some customers have reported success as far back as Logic Pro 11.2. If you are running an earlier version of Logic Pro, this may be preventing the new integration features from working. Please update Logic Pro if you have tried all the troubleshooting steps without success.

Setup

- Launch Logic Pro.
- You should be greeted with the following OSC pop-up message.
- Click '**Connect**'. [SSLAD10601] will be your computer's name.
- In the **Logic Pro -> Control Surfaces -> Setup...** menu, ensure the newly created SSL 360 OSC Device is positioned beneath your Mackie Control unit(s), like in the image below.

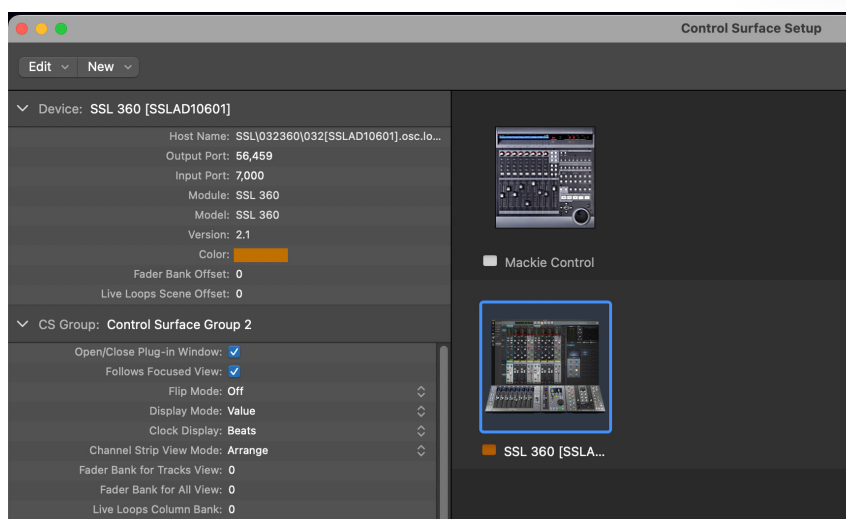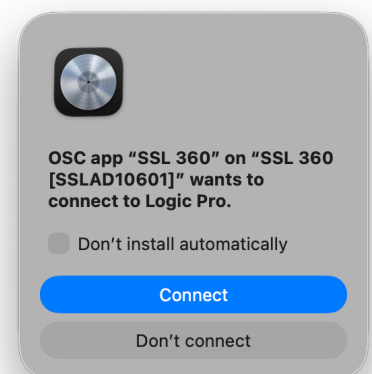


Troubleshooting

If you did not see the OSC pop-up message, asking you to connect, then Automatic Installation might have been switched off.

In the **Logic Pro -> Control Surfaces -> Setup...** menu, click the 'New' dropdown list and tick 'Automatic Installation'. If it is already ticked, try toggling it off and then back on again.

Ensuring that Automatic Installation is now ticked, close Logic Pro and re-open it - the OSC pop-up prompt should now appear.

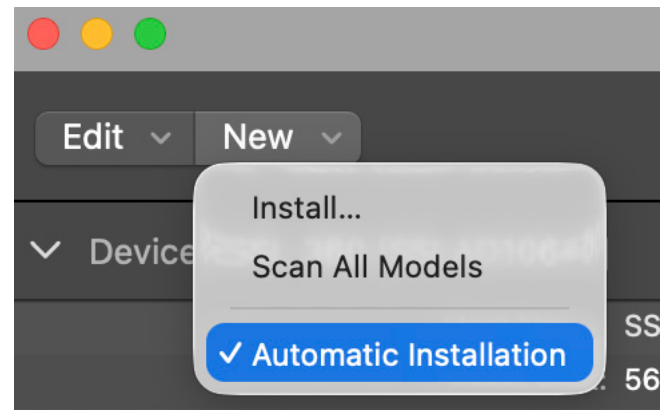

Please note that although you can manually add the SSL 360 OSC device via the 'Install...' menu, this will not work. For the OSC integration to work, it must be automatically discovered by Logic Pro.


Still Not Working?

Other important aspects to check that could be preventing the OSC integration from working:

- [Read this FAQ](#), which is kept up-to-date with more troubleshooting steps to try.
- If you have just updated SSL 360° (and your 360° plug-ins), you might need to try restarting your computer. It should not be necessary but is worth trying in case the SSL360Core did not restart correctly after updating.
- If you have Logic Pro set to automatically launch at login (Login Items & Extensions on your Mac), disable this. Logic Pro (or any DAW), launching before the background SSL360Core service has started running, can lead to issues.

Important - Bus Compressor 2 and 360 Link Bus Compressors on Aux/Bus Tracks

As of SSL 360 v2.1.12 and above, in order for UC1 to see and control your Bus Compressor 2 / 360 Link Bus Compressor plug-ins, you need to right-click on the Aux/Bus track in the Logic Mixer and select 'Create Track'. The same applies for Channel Strips on Aux/Bus tracks!

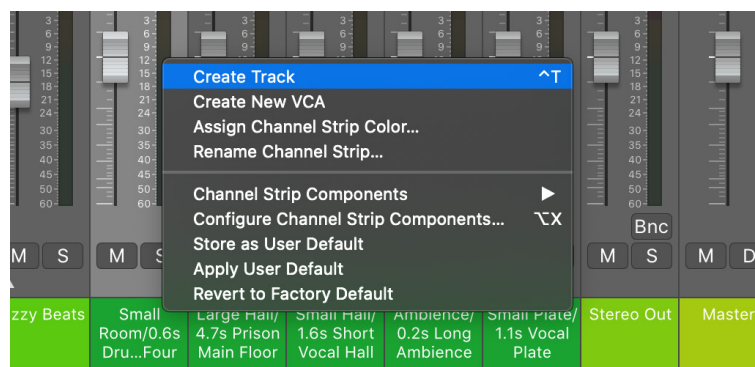

Important Change to Solos and Mutes System


In SSL 360 v2.0.6 and below, the solo and mute system worked in a different way. When you solo'd a 360°-Channel Strip, it muted the outputs of all other channel strips in the Logic Pro session. With SSL 360 v2.1.12, we are now more tightly integrated into Logic Pro and as such, we control the solo and mutes of the Logic Pro tracks themselves.

Plug-in Mixer

The Plug-in Mixer is a place to view and control 360°-enabled plug-ins (including 3rd party plug-ins hosted in 360 Link and 360 Link Bus Compressor) from your DAW session. It's like having access to your own virtual SSL console in your computer! Best of all, the Plug-in Mixer is available to everyone who uses 360°-enabled plug-ins, serving as a way of enhancing your workflow. Also, it does not require UC1 to be connected, meaning that if you're unable to take your hardware with you on the road, you can still enjoy the experience of the Plug-in Mixer



Left-Hand Side Toolbar - Options




HOSTS

Allows you to switch control between up to 3 different host DAWs that are connected to the Plug-in Mixer. When channel strip and/or bus compressor plug-ins are inserted in your DAW, they trigger that DAW to come online as a **HOST** in the Plug-in Mixer. Clicking on the appropriate **HOST** button will switch the Plug-in Mixer (and UC1) to control that DAW.

When using UC1 with Pro Tools from SSL 360° v2 onwards, some additional status information about the connection between SSL 360° and PTSL is shown. PTSL enables UC1 access to track colours, ordering and selection from Pro Tools. If Pro Tools is open but the connection to PTSL is not working/has failed, then this area will turn into a 'Restart PTSL' button with a red indicator. The button allows you to manually restart the connection between SSL 360° and PTSL. Otherwise, this area it will show a green indicator 'PTSL Active' to indicate the connection is working as expected. Or, it will indicate it is in the process of connecting, with an orange indicator.

CHAN STRIPS



Collapse

When you have multiple 360°-enabled channel strips on the same DAW track, the Collapse feature allows you to collapse them down to view one channel strip at a time.


Auto Select

With Auto Scroll enabled, adjusting a channel strip plug-in parameter will cause that particular instance of channel strip to become the selected one in the Plug-in Mixer/UC1.

Auto Scroll

With Auto Scroll enabled, the Plug-in Mixer window will automatically scroll to make sure the selected instance of channel strip is visible on screen.

TRACK SEL SYNC




Bus Comps

When this option is enabled, the selected Bus Compressor 2 or 3rd party plug-in hosted in 360 Link Bus Compressor will follow the selected track in the DAW (assuming you have a plug-in instance on that track).

Meter Plug-ins

When this option is enabled, the selected Meter Pro/Meter plug-in will follow the selected track in the DAW (assuming you have a plug-in instance on that track).



SHOW/HIDE


Transport

Shows/hides the Transport Bar.

Colours

Shows/hides the DAW Track Colour segments.

MOUSE WHEEL




Scroll Mixer

Mouse scroll vertically and horizontally navigates the Plug-in Mixer window. Hold the CTRL key on your keyboard to temporarily over-ride this behaviour in favour of scrolling controls and faders in the Plug-in Mixer instead.

Scroll Controls

Mouse scroll operates channel strips and bus compressor controls and faders in the Plug-in Mixer.


ZOOM



Default/Overview

Allows you to change the zoom level of the channel strips in the Plug-in Mixer. Click on the drop-down arrows to customise the scaling for each option, to best suit your computer display resolution.

AUTOMATION



Note this feature is only supported by Logic Pro, Cubase/Nuendo, Studio Pro, LUNA, Bitwig, REAPER

The DAW's Automation buttons will be available directly from the Plug-in Mixer page in SSL 360°. This means you can easily select tracks and automate them directly from the Plug-in Mixer.

Note that these buttons rely on MCU automation commands via your configured Mackie Control. Ensure you have configured the Mackie Control in your DAW and that the CONTROL SURFACE 'Plug-in Mixer Transport & Hybrid Mode Linked To' (CONTROL SETUP page in SSL 360°) is set correctly.

Follow the instructions in the Transport Control & Hybrid Mode Setup section at the end of this user guide to configure this correctly for your DAW.

Channel Strip Metering

- 1 - Expands/collapses section
- 2 - Toggles between channel strip Input or Output Metering



Centre Section Sidebar

Expands/collapses the Centre Section sidebar that contains bus compressor and SSL Meter instances.



DISPLAY

Strips/Routing

3 - When you the Collapse Channel Strips features is active (presumes you have multiple 360°-enabled channel strips on the same DAW track), the Strips/Routing Display option will become available. This determines if you are viewing the list of channel strips on a given DAW track, or if you are viewing the channel strip routing of the selected channel strip. When displaying the list of channel strips on a DAW track, simply click the text to select the desired instance (or use the CHANNEL encoder on UC1).




Strips View



Routing View

PIN

In Strips View, you can determine which channel strip you would like the Plug-in Mixer to 'bounce back' to when you select a different track, by selecting the PIN icon.



PAN & FADER


The **PLUG-IN** and **DAW** buttons in the fader tray section toggle the Plug-in Mixer between controlling the plug-in's own fader and pan, or the DAW's fader and pan.

Please note that it is not possible to control the faders or pans of Pro Tools tracks in the Plug-in Mixer.



SOLO CLEAR

Clears any active channel strip solos.

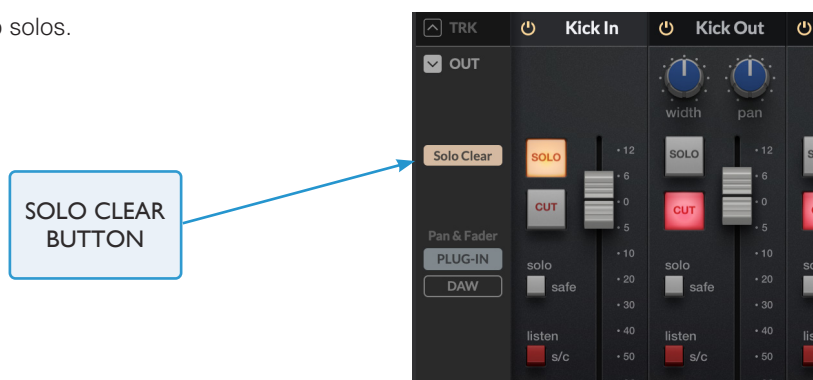

Plug-in Mixer Keyboard Shortcuts

Some useful keyboard shortcuts you can use in the Plug-in Mixer.

Action	Keyboard Shortcut
Space Bar	Transport: Play/Stop*
Z	Transport: Rewind*
X	Transport: Forward*
R	Transport: Record*
L	Transport: Loop/Cycle*
D	Toggles Pan and Faders between PLUG-IN and DAW
S	Solo Clear
C	Collapse/Expand Channel Strips
M	Mouse Wheel Scroll Mixer/Scroll Controls
1	Zoom: Default
2	Zoom: Overview
Bypass Channel Strip	Alt+Mouse Click
Move Plug-in Mixer Up/Down/Left/Right	Up, Down, Left, Right
Fine Control of Knobs	CTRL + Mouse click and drag

*Requires [Transport Control](#) to be configured.

Adding/Removing Channel Strips to the Plug-in Mixer

Plug-ins are automatically added to the Plug-in Mixer when you instantiate them in the DAW session. Deleting a plug-in in the DAW session will remove it from the Plug-in Mixer.

Channel Strip Ordering in the Plug-in Mixer

The way in which the Plug-in Mixer works varies between DAWs. All supported DAWs allow the DAW track name to be 'pulled through' so that the channel strip is automatically labelled, however, the way in which channel strips are ordered in the Plug-in Mixer depends on the DAW:

DAW	Plug-in Mixer Ordering
Pro Tools 2025 and below	Instantiation Time + Manual
Pro Tools 2025 and above & SSL 360 v2 and above	Automatic
Logic 10.6.0 and below	Instantiation Time + Manual
Logic 10.6.1 and above	Automatic
LUNA 1.4.5 and below	Instantiation Time + Manual
LUNA 1.4.6 and above	Automatic (must use VST3s)
Cubase/Nuendo	Automatic (must use VST3s)
Live	Automatic (must use VST3s)
Studio One	Automatic (must use VST3s)
REAPER	Automatic (must use VST3s)
Bitwig Studio	Automatic (must use VST3s)
Digital Performer	Automatic (must use VST3s)
FL Studio	Automatic (must use VST3s)
Mixbus 11 and above	Automatic (must use VST3s)



Position in
Plug-in Mixer

Automatic

For DAWs that fall into this category, the ordering of channel strips in the Plug-in Mixer will dynamically follow the order of the tracks in your DAW session. You cannot manually re-arrange channel strips in this mode.

Instantiation Time + Manual


For DAWs that fall into this category, Channel Strips are added sequentially to the Plug-in Mixer, based on when they were inserted into the DAW session. **You can re-order channel strips in the Plug-in Mixer by clicking and dragging in the track name area.**



Click and drag in the Track Name area to re-order in non-automatic DAWs

Logic Pro 10.6.1 and above - Aux Tracks


Aux Tracks in Logic do not initially provide the Plug-in Mixer with a DAW track number. As a result, the Plug-in Mixer will position Aux tracks on the right-hand end of the Plug-in Mixer automatically. However, if you wish to allow Aux Tracks to dynamically update their position in the Plug-in Mixer (like with Audio and Instrument tracks), then in Logic right-click **Create Track** on each one. This will add it to the Arrangement page, which will then enable the Plug-in Mixer to synchronise with the Logic track number - meaning that Aux tracks will also follow the order of your Logic session.

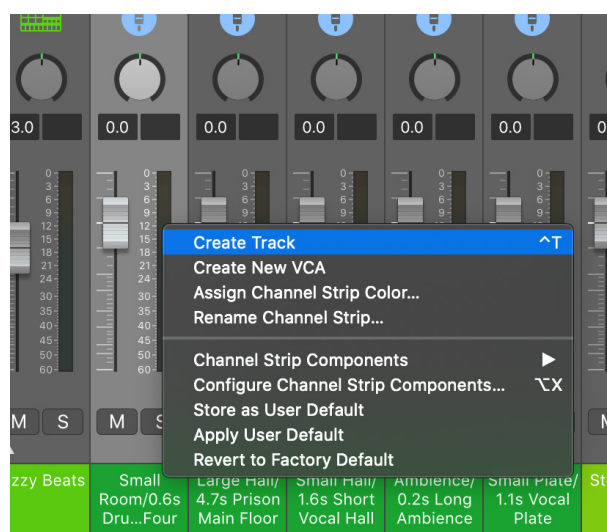

In the Logic Mixer, right-click in the track name area and select 'Create Track'

Logic Pro 10.6.0 and below - Disable Dynamic Plug-in Loading

We recommend that you use Logic 10.6.1 with the UC1 and Plug-in Mixer system, however, if you are using Logic 10.6.0 or below, it is important that you disable Dynamic Plug-in Loading at the start of each project as it can cause issues. This step does not apply if you are using 10.6.1. Go to File > Project > General and un-tick **Only load plug-ins needed for project playback**.

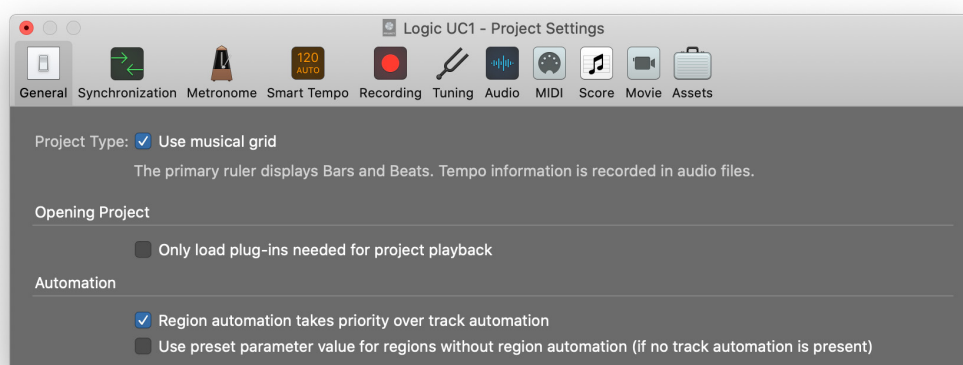

Logic 10.6.0 and below users, make sure that 'Only load plug-ins needed for project playback' is un-ticked at the start of each project

Adding/Removing Bus Compressors to the Plug-in Mixer

Plug-ins are automatically added to the Plug-in Mixer when you instantiate them in the DAW session. Deleting a plug-in in the DAW session will remove it from the Plug-in Mixer.



Bus Compressor Ordering in the Plug-in Mixer

Bus Compressor plug-ins appear on the right-hand side of the Plug-in Mixer, as they are added to the DAW session. **Up to 192 instances** of Bus Compressor 2 and/or 3rd party plug-ins hosted in 360 Link Bus Compressor can appear in the Plug-in Mixer and therefore be controlled from UC1. The ordering of bus compressors is DAW dependent. You cannot manually re-order bus compressor plug-ins in the Plug-in Mixer.

DAW	Plug-in Mixer Ordering
Pro Tools 2025 and below	Instantiation Time + Manual
Pro Tools 2025 and above & SSL 360 v2 and above	Automatic
Logic 10.6.0 and below	Instantiation Time + Manual
Logic 10.6.1 and above	Automatic
LUNA 1.4.5 and below	Instantiation Time + Manual
LUNA 1.4.6 and above	Automatic (must use VST3s)
Cubase/Nuendo	Automatic (must use VST3s)
Live	Automatic (must use VST3s)
Studio One	Automatic (must use VST3s)
REAPER	Automatic (must use VST3s)
Bitwig Studio	Automatic (must use VST3s)
Digital Performer	Automatic (must use VST3s)
FL Studio	Automatic (must use VST3s)
Mixbus 11 and above	Automatic (must use VST3s)

Instantiation Time - For DAWs that fall into this category, bus compressors are added sequentially to the Plug-in Mixer, based on when they were inserted into the DAW session.

Automatic - For DAWs that fall into this category, the ordering of bus compressors in the Plug-in Mixer will dynamically follow the order of the tracks in your DAW session.

Logic Pro - Bus Compressor 2 and 360 Link Bus Compressors on Aux/Bus Tracks

As of SSL 360 v2.1.12 and above, in order for UC1 to see and control your Bus Compressor 2 / 360 Link Bus Compressor plug-ins, you need to right-click on the Aux/Bus track in the Logic Mixer and select 'Create Track'.



In the Logic Mixer, right-click in the track name area and select 'Create Track'

Selecting a Channel Strip

To select a channel strip in the Plug-in Mixer, simply click anywhere on the strip's background. There are other ways of selecting a channel strip, which include using the **CHANNEL** encoder on the UC1 hardware, opening the plug-in GUI in the DAW session and in certain supported DAWs, selecting the DAW track.


Follow DAW Track Selection

Synchronisation of the selected DAW track and Plug-in Mixer channel strip is available for the following DAWs:

- Pro Tools 2025 and above, using SSL 360 v2 and above
- Logic Pro, using SSL 360 v2.1 and above
- Cubase/Nuendo
- Ableton Live
- Studio One
- REAPER
- LUNA
- Bitwig Studio
- Digital Performer
- FL Studio (one-way only - 360 follows FL Studio selects)
- Mixbus 11 and above

Selecting a Bus Compressor

To select a bus compressor in the Plug-in Mixer, simply click on the meters of the bus compressors on the right-hand side. Alternatively, use the secondary encoder on the UC1 hardware or open the plug-in GUI in the DAW session.



Bus Comp Follow Trk Sel

As of SSL 360 v2 and above, Bus Compressors are also able to follow DAW Track selection. The DAWs compatible with this feature are the same as the Channel Strip bullet point list above. Ensure the 'Follow Trk Sel' option for Bus Comps is enabled in the Plug-in mixer.



Selected channel strip & bus compressor has a blue outline



Restrictions and Important Notes

Multi-Mono Plug-ins in the Plug-in Mixer

Installers for multi-mono channel strip and Bus Compressor 2 plug-ins are provided as they always have been with SSL Native plug-ins. However, it is important to note the following:

Logic - Multi-mono plug-ins are not supported in the Plug-in Mixer - this is because we are currently unable to retrieve the DAW track name.

Pro Tools - Multi-mono plug-ins can be used but control is restricted to the left-hand 'leg' only.

'Save As Default' For 360°-enabled channel strips and Bus Compressor 2 Plug-ins

All DAWs recommendation

For some, using the **Save As Default** feature is a crucial aspect of day-to-day workflow. This feature allows you to alter the default positions of the channel strip and Bus Compressor 2 plug-in parameters, so that they load with your favourite 'starting point' settings.

If this feature is essential for you, we recommend that you use the **Save As Default** option found in the 4K E / 4K B / Channel Strip / Bus Compressor 2 Preset Management List and **not** the DAW's own preset system.

The **Pro Tools** <User Default> feature is disabled for channel strip plug-ins and Bus Compressor 2 because it was found to be incompatible with the Plug-in Mixer system. Please ensure that you use SSL plug-ins' own 'Save As Default' feature.



Use the Channel Strip's own 'Save As Default' feature, instead of the DAW's.

Not Supported - Mixing VST and AU formats

All DAWs recommendation


The Plug-in Mixer system hooks into special VST3 extensions in order to more tightly integrate with the DAW in Cubase, Live and Studio One. Therefore, using a mixture of AUs and VST3s in a session is not supported. Stick to only using VST3 channel strips and Bus Compressors in these DAWs.

Transport Control & Hybrid Mode Setup

Introduction

Transport control from UC1 and the Plug-in Mixer.

Please note, these Transport commands are powered by HUI/MCU commands, **so therefore you must follow the Setup instructions on the pages that follow for the Transport control to work.**

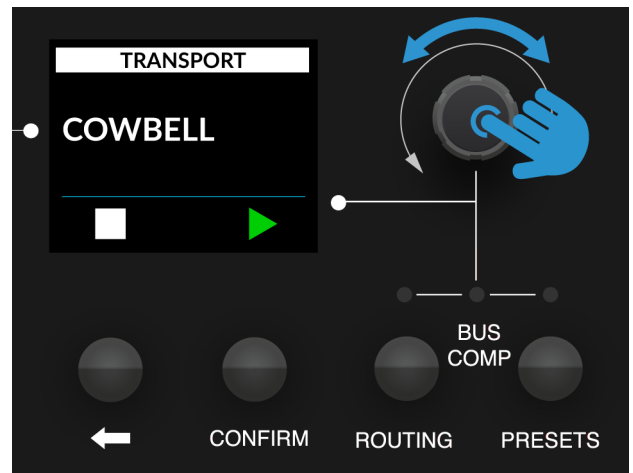

UC1 front panel Transport Control



The Plug-in Mixer Transport Bar

Transport Bar - Buttons

You can access the following DAW Transport commands:

- Rewind
- Forward
- Stop
- Play
- Record
- Loop



The Transport Bar Buttons

Transport Bar - Display Readout

Pro Tools

The format is determined by what is currently set in Pro Tools itself and cannot be changed from the Plug-in Mixer. The counter will display one of the following formats:

- Bars/Beats
- Mins:Secs
- Timecode
- Feet+Frames
- Samples



In MCU DAWs (Logic/Cubase/Studio One) you can toggle between Bars/Beats by clicking with the mouse in the display area

MCU DAWs

In Logic, Cubase, Live, Studio One, and LUNA the Plug-in Mixer Transport counter can display a choice of the following formats:

- Bars/Beats
- SMPTE or Min:Secs Time*

**The format is determined by the DAW Host*

8 x Virtual Soft keys




The 8 x Virtual Soft Keys allow you to trigger HUI/MCU commands from the linked Transport/Hybrid Mode DAW Layer. Use the Settings Cog on the right-hand side to pick form the list of available commands for your DAW, edit the short label and add a colour.

Plug-in Mixer Transport & Hybrid Mode - Setup

The Transport and Hybrid Mode (Automation Keys & 8 x Virtual Soft Keys) functionality of the Plug-in Mixer & UC1 front panel is achieved using HUI/MCU commands. In order for it to function, you must configure a HUI or MCU controller in your DAW. On the following pages are instructions on how to configure a HUI or MCU controller. Once configured, the **CONTROL SETUP** page of SSL 360° allows you to choose which DAW the Plug-in Mixer Transport & Hybrid Mode is linked to. The DAW setup examples that follow presume that **DAW 1** (i.e. SSL V-MIDI Port 1) is the DAW for which you wish to configure the Transport control. For completeness, the table below specifies which SSL V-MIDI ports would be required for **DAW 2** and **DAW 3**, should you wish for either of those to be driving the Transport commands.

DAW 1	DAW 2	DAW 3
SSL V-MIDI Port 1	SSL V-MIDI Port 5	SSL V-MIDI Port 9

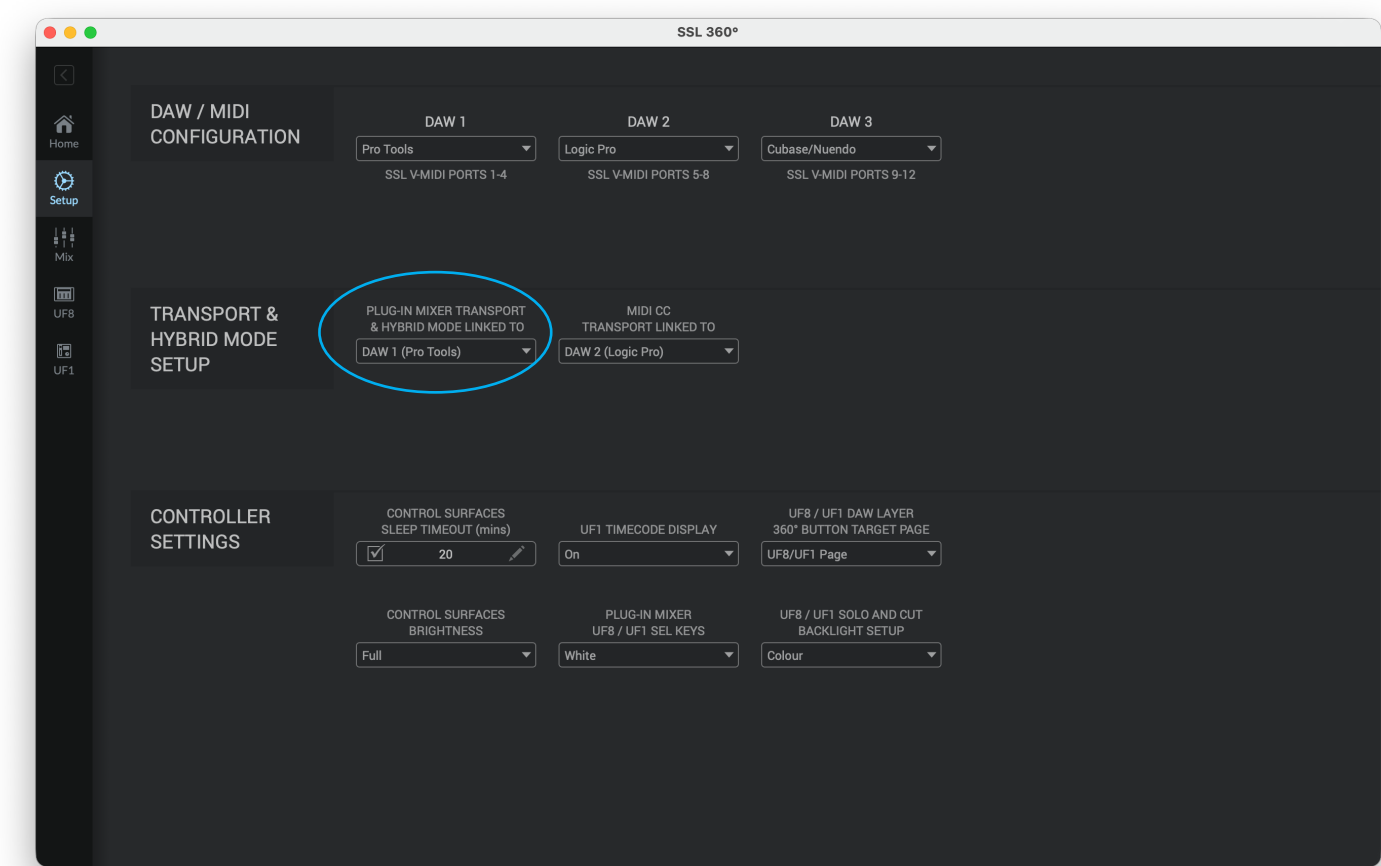

The 'PLUG-IN MIXER TRANSPORT & HYBRID MODE LINKED TO' setting determines which DAW the HUI/MCU commands are 'pulled through' from. You will also need to setup a HUI/Mackie Control in your DAW. See the next pages for more information.


Pro Tools

STEP 1: Open Pro Tools. Go to the **Setup** Menu > **MIDI** > **MIDI Input Devices...**


In this list, ensure that **SSL V-MIDI Port 1** is ticked (presuming DAW 1 is being configured to drive the Transport).

STEP 2: Go to the **Setup** Menu > **Peripherals** > **MIDI Controllers** tab. Select **HUI** Type. Set to **Receive From SSL V-MIDI Port 1 Source** and then **Send To** as **SSL V-MIDI Port 1 Destination**.


STEP 3: In SSL 360°, on the **CONTROL SETUP** page configure **DAW 1** as **Pro Tools** from the **DAW CONFIGURATION** drop-down list and also select **DAW 1 (Pro Tools)** in the **TRANSPORT LINKED TO** drop-down list.

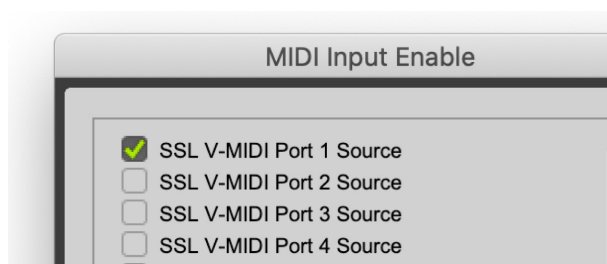

STEP 1 : Enable SSL V-MIDI Port 1 in Pro Tools.

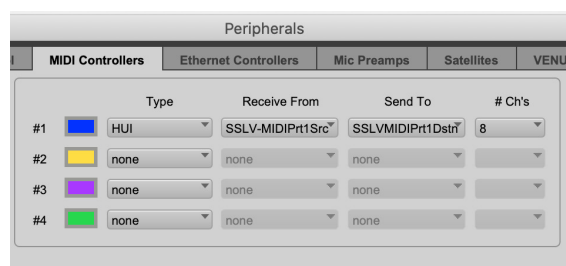

STEP 2 : Set up a HUI controller to Receive From and Send to SSL V-MIDI Port 1.

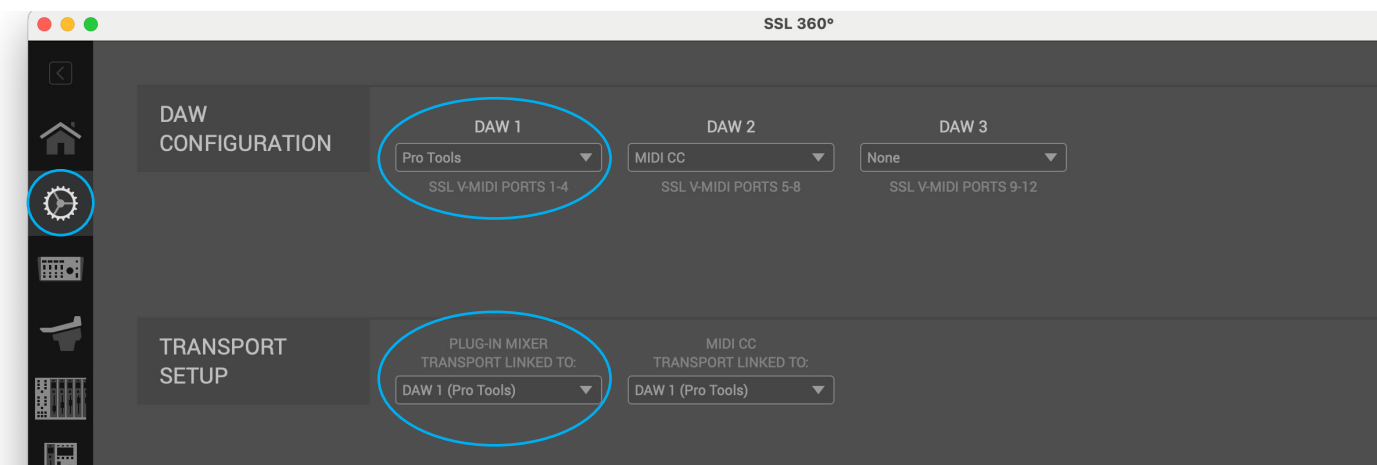


STEP 3 : On the CONTROL SETUP tab, set DAW 1 to Pro Tools in DAW CONFIGURATION and also set TRANSPORT LINKED TO as DAW 1 (Pro Tools).

Logic Pro


STEP 1: Go to **Preferences > MIDI** and select the **Inputs** tab. In this list, ensure that **SSL V-MIDI Port 1** is ticked (presuming DAW 1 is being configured to drive the Transport). Versions of Logic preceding 10.5 may not have the 'Inputs' tab available. If so, you can skip this step, as all MIDI ports are turned on by default.

STEP 2: Go to the **Control Surfaces > Setup**. Click **New > Install...** from the drop-down list in the top-left of the window. From this list, choose **Mackie Designs | Mackie Control | Logic Control** and click the **Add** button. Click on the image of the Mackie Control that has been added to the window and in the device setup options list on the left-hand side, configure the **Output Port** to **SSL V-MIDI Port 1 Destination** and set the **Input Port** to **SSL V-MIDI Port 1 Source**.


STEP 3: In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as **Logic Pro** from the dropdown list and also select **DAW 1 (Logic Pro)** in the **TRANSPORT LINKED TO** list below.

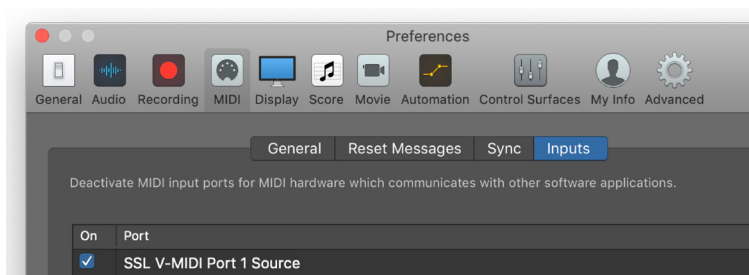

STEP 1 : Enable SSL V-MIDI Port 1 in Logic Pro.

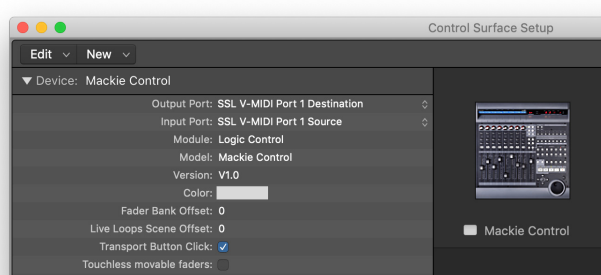

STEP 2: Add a Mackie Control and configure the Output and Input Port to SSL V-MIDI Port 1.

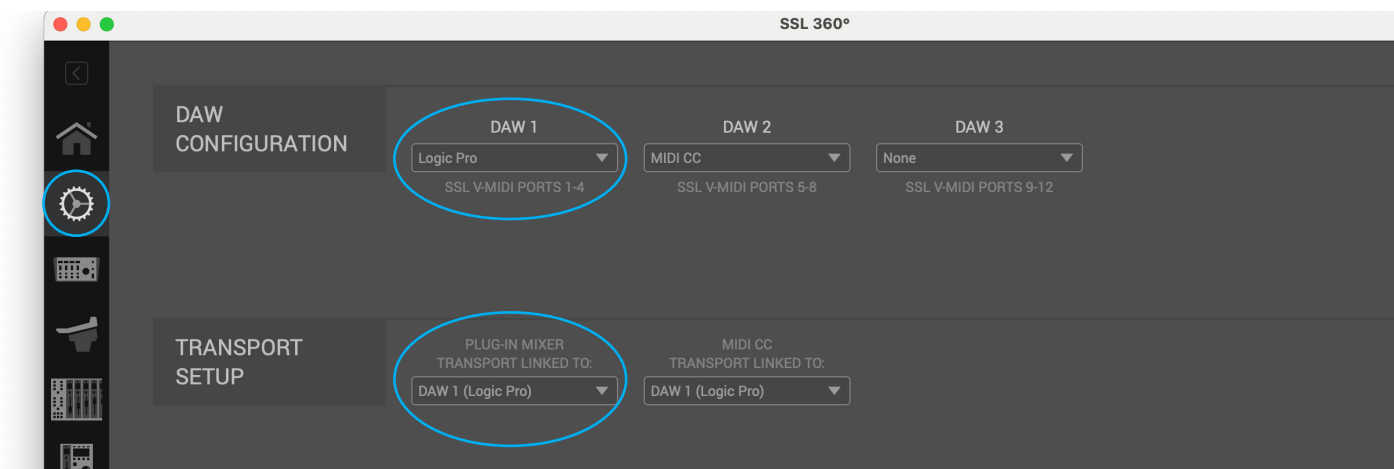


STEP 3 : On the CONTROL SETUP tab, set DAW 1 to Logic Pro in DAW CONFIGURATION and also set TRANSPORT LINKED TO as DAW 1 (Logic Pro).

Cubase


STEP 1: Open Cubase. Go to **Studio > Studio Setup...** Click the **+** symbol in the top-left of the window and select **Mackie Control** from the drop-down list. Set the **MIDI Input** to **SSL V-MIDI Port 1 Source** and set **MIDI Output** to **SSL V-MIDI Port 1 Destination**. Click **Apply**.

STEP 2: Next, go to **Studio Setup > MIDI Port Setup** and deactivate (un-tick) the **In 'ALL MIDI Inputs'** option for your **SSL V-MIDI Ports** and click **OK**. This will ensure that MIDI Instrument Tracks set to receive from **ALL MIDI Inputs** do not pickup MIDI data.


STEP 3: In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as Cubase from the drop-down list and also select **DAW 1 (Cubase)** in the **TRANSPORT LINKED TO** list below.

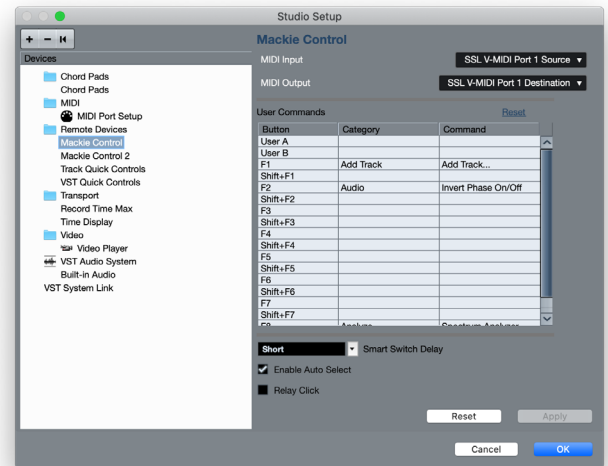

STEP 1 : Go to Studio > Studio Setup. Add a Mackie Control and configure the MIDI Input to SSL V-MIDI Port 1 Source and MIDI Output to SSL V-MIDI Port 1 Destination.

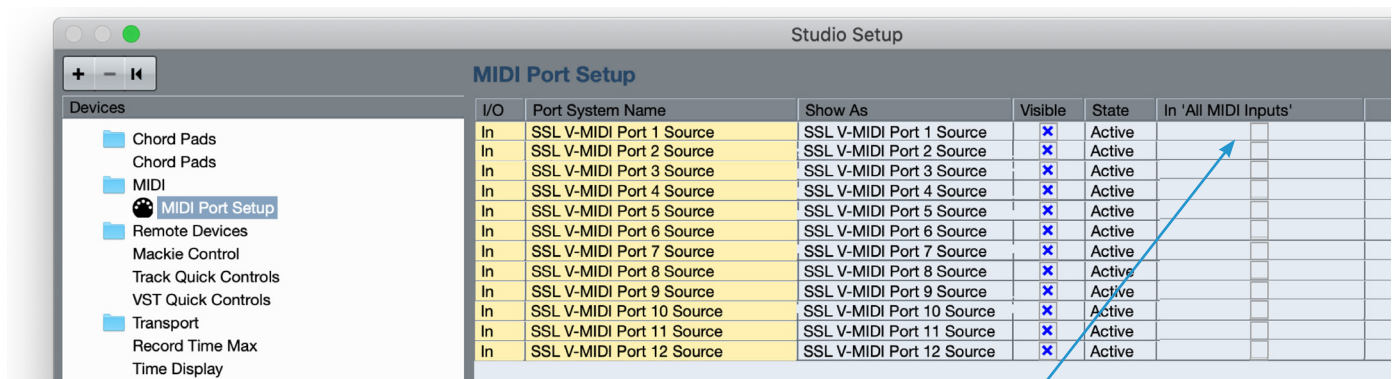

STEP 2 : Disable (un-tick) In 'ALL MIDI Inputs' for SSL V-MIDI Ports

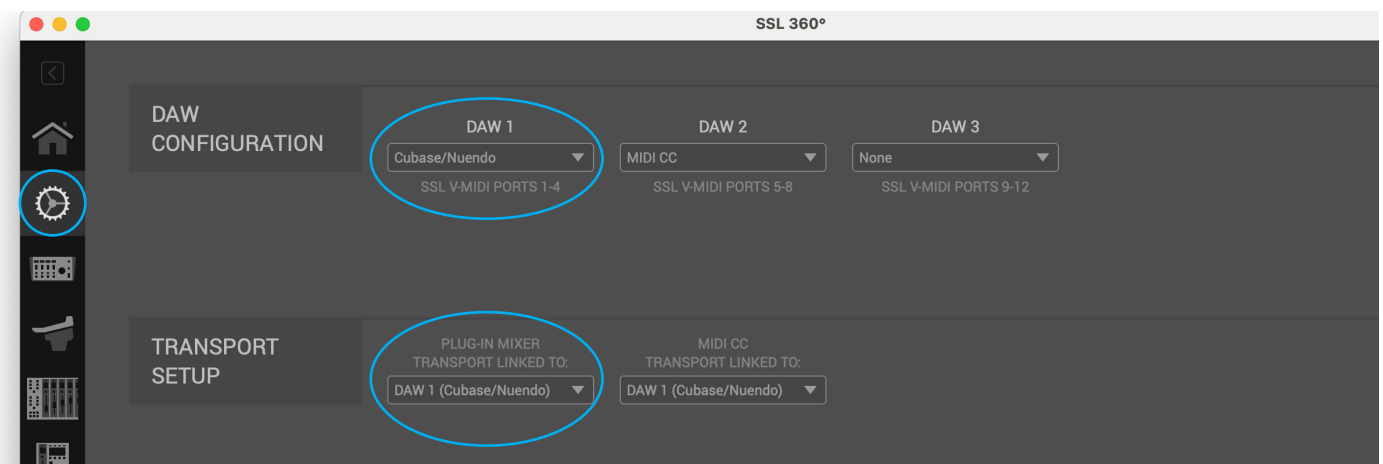


STEP 3 : On the CONTROL SETUP tab, set DAW 1 to Cubase in DAW CONFIGURATION and also set TRANSPORT LINKED TO as DAW 1 (Cubase).


Live

STEP 1: Open Live. Go to **Preferences > Link MIDI...** from the Control Surface drop-down list select **MackieControl**. Set the Input to **SSL V-MIDI Port 1 Source** and set Output to **SSL V-MIDI Port 1 Destination**.

STEP 2: In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as Live from the drop-down list and also select **DAW 1 (Ableton Live)** in the **TRANSPORT LINKED TO** list below.

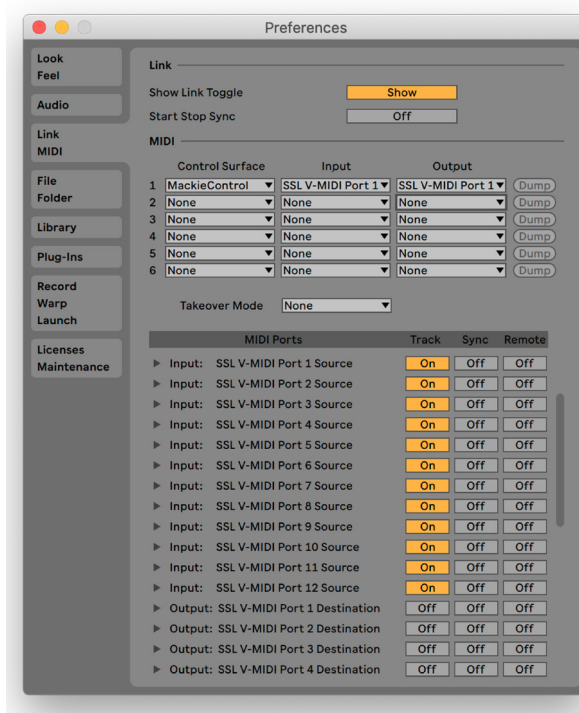

STEP 1 : Go to Preferences > Link MIDI. Choose Mackie Control from the Control Surface drop-down list. Set the Input to SSL V-MIDI Port 1 Source and set Output to SSL V-MIDI Port 1.

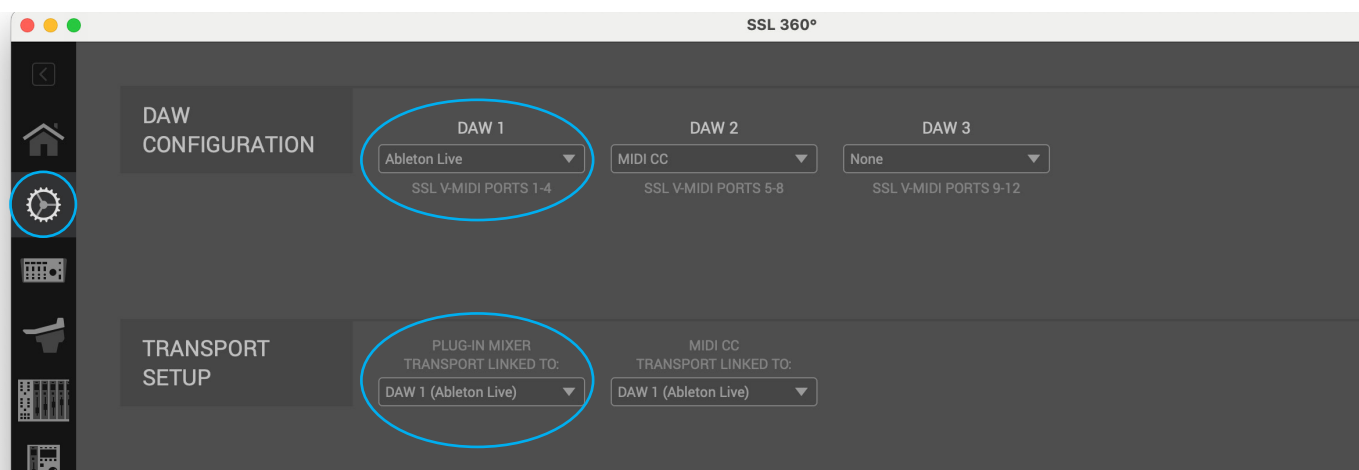


STEP 2 : On the CONTROL SETUP tab, set DAW 1 to Live in DAW CONFIGURATION and also set TRANSPORT LINKED TO as DAW 1 (Ableton Live).


Studio One

STEP 1: Open Studio One. Go to **Preferences > External Devices** and click on the **Add...** button. In the Add Device window, select **Mackie Control** and set **Receive From** to **SSL V-MIDI Port 1 Source** and set **Send To** to **SSL V-MIDI Port 1 Destination**. Click **OK**.

STEP 2: In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as **Studio One** from the drop-down list and also select **DAW 1 (Studio One)** in the **TRANSPORT LINKED TO** list below

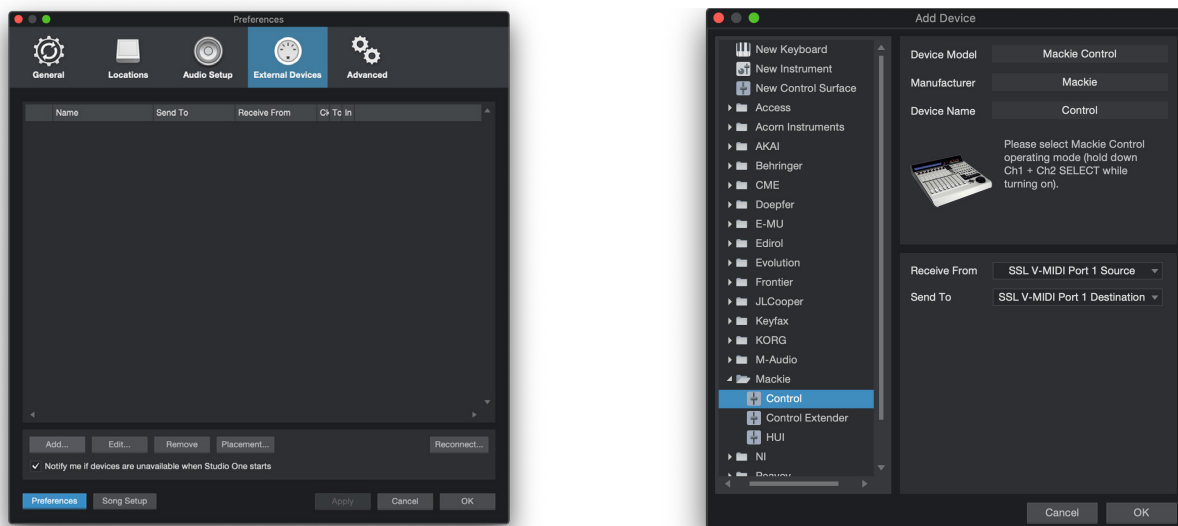


STEP 1: Go to Preferences > External Devices and click on the Add button. Add a Mackie Control and set it to Receive From SSL V-MIDI Port 1 Source and Send To SSL V-MIDI Port 1 Destination. Click OK.

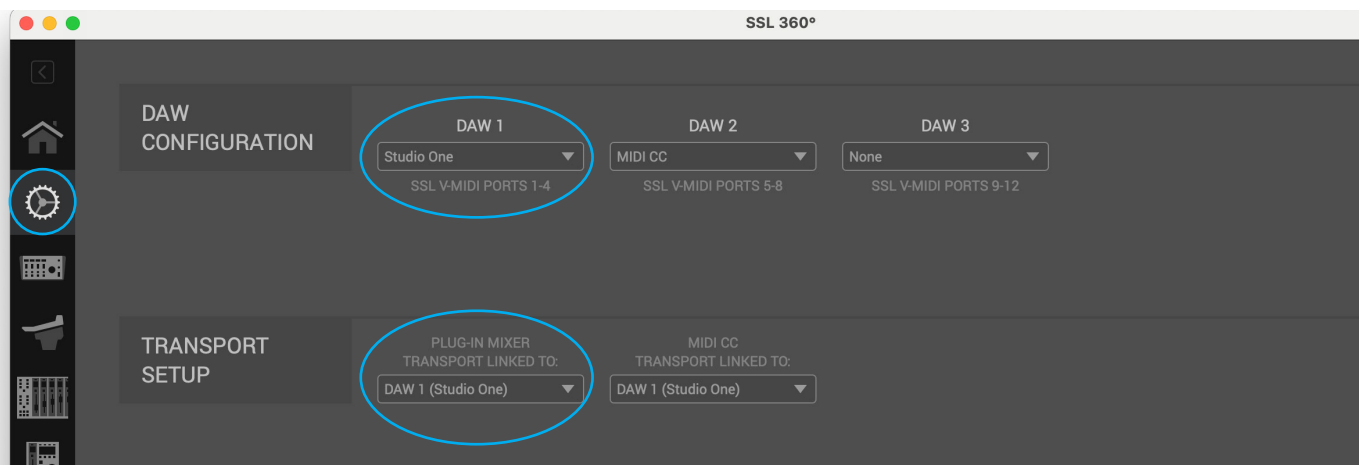


STEP 2 : On the CONTROL SETUP tab, set DAW 1 to Studio One in DAW CONFIGURATION and also set TRANSPORT LINKED TO as DAW 1 (Studio One).

LUNA

1. Open the LUNA sidebar by clicking the UA diamond logo on the left of the screen, and clicking **Settings**, or choose **LUNA > Preferences** from the app menu. **Click Controllers.**
2. In one of the MIDI Control Surface rows, click under **Input Device** and select **SSL V-MIDI Port 1 Source** and under **Output Device** select **SSL V-MIDI Port 1 Destination**.
3. Select the box in the **ON** column to enable the control surface.

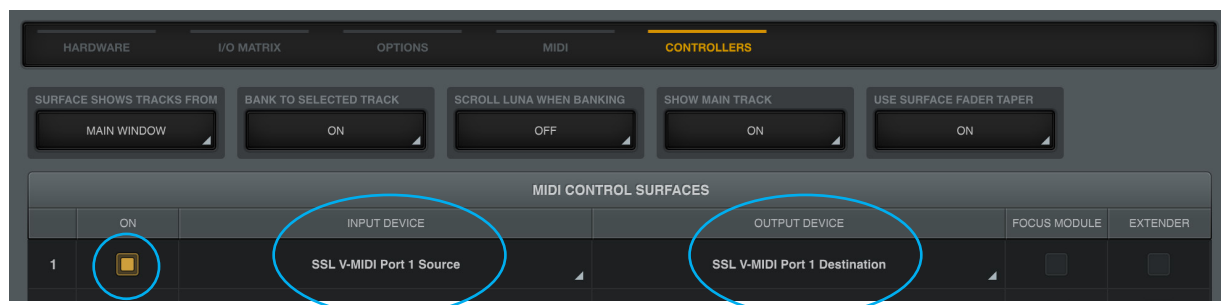


4. In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as **LUNA** from the drop-down list and also select **DAW 1 (LUNA)** in the **TRANSPORT LINKED TO** list below.

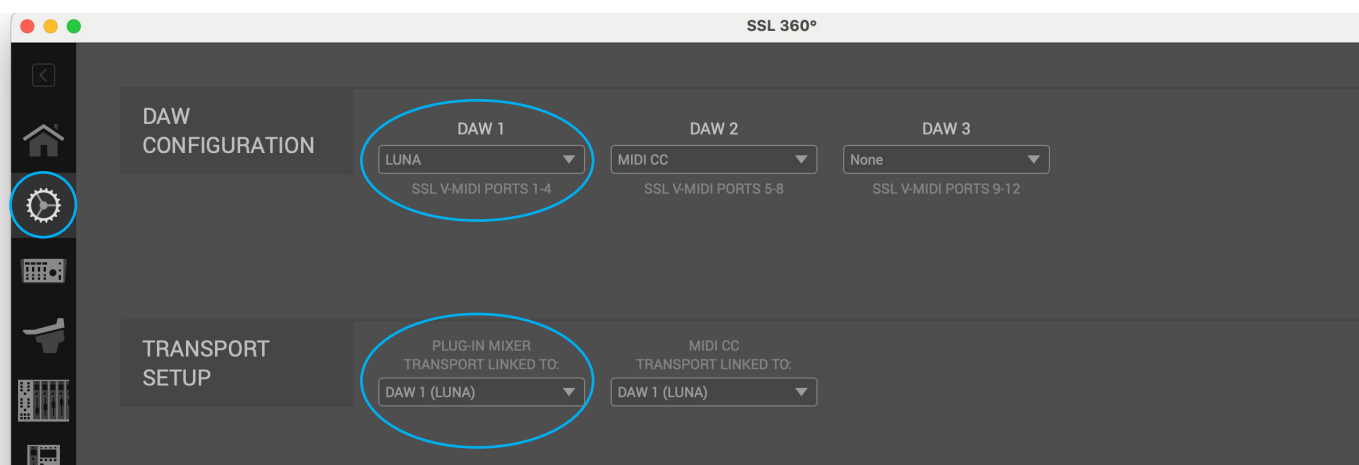


REAPER

1. Open REAPER **Preferences** and choose **Control/OSC/web** from the toolbar on the left-hand side.
2. Click the **Add** button and choose **Mackie Control Universal** for the **Control Surface Mode**.
3. Set the **MIDI input** to **SSL V-MIDI Port 1 Source** and **MIDI output** to **SSL V-MIDI Port 1 Destination**.

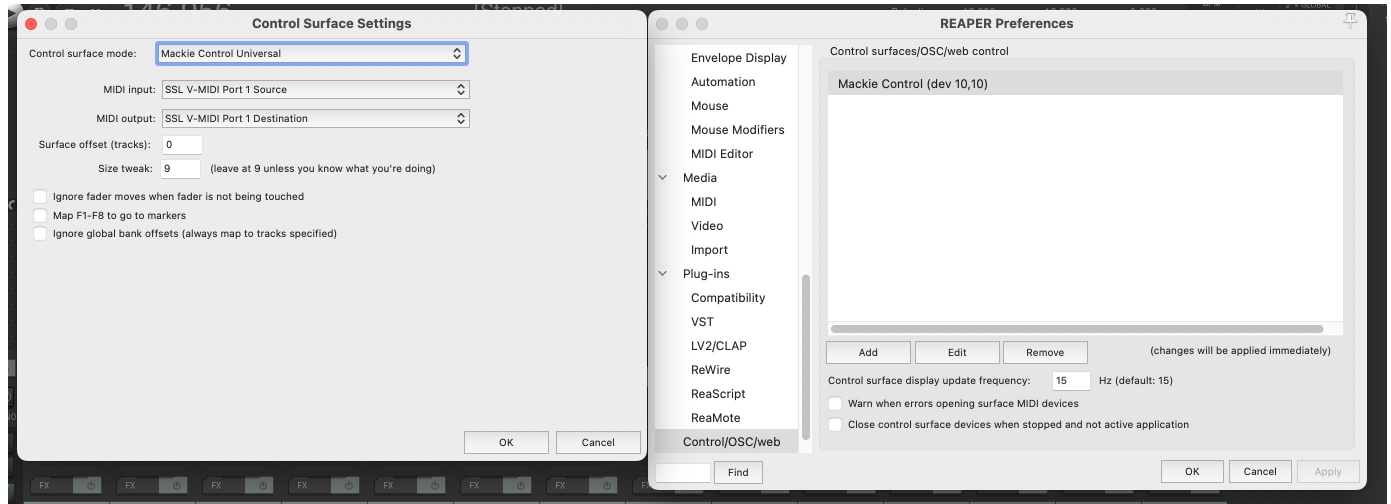


4. In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as **REAPER** from the drop-down list and also select **DAW 1 (REAPER)** in the **TRANSPORT LINKED TO** list below.

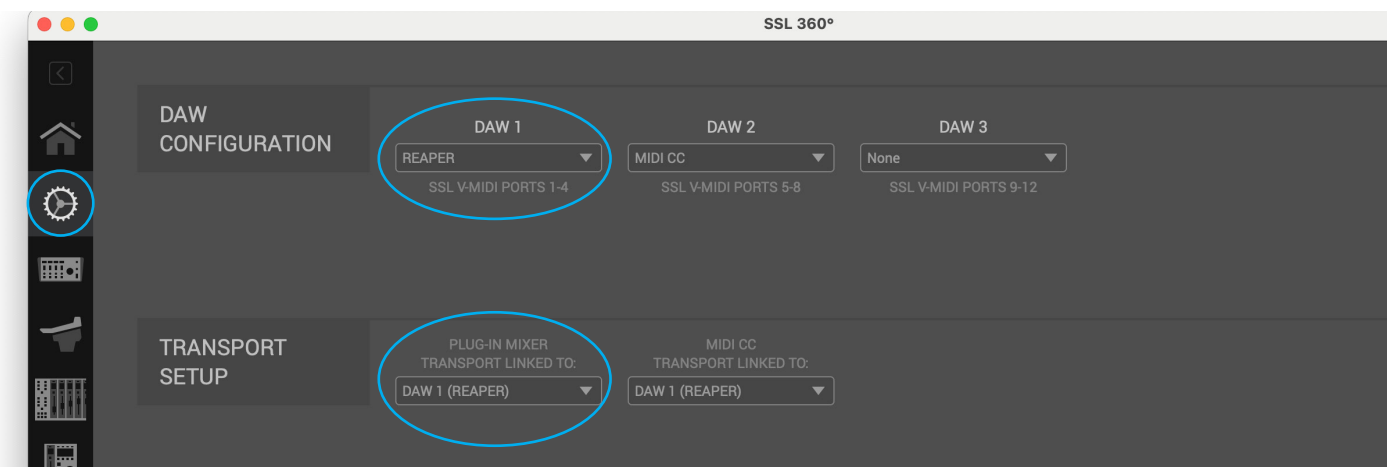


Digital Performer

1. In Digital Performer, go to the **Setup** menu and choose **Control Surface Setup...**
2. Click the **+** button and choose **SSL 360 Control** from the **Driver** drop-down box.
3. Make sure **Unit** is set to **Main Unit** and then configure the **Input Port** to **SSL V-MIDI Port 1 Source** and **Output Port** to **SSL V-MIDI Port 1 Destination**.

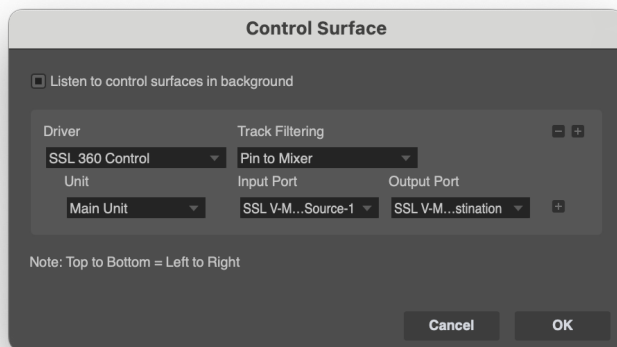


4. In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as **Digital Performer** from the drop-down list and also select **DAW 1 (Digital Performer)** in the **TRANSPORT LINKED TO** list below.

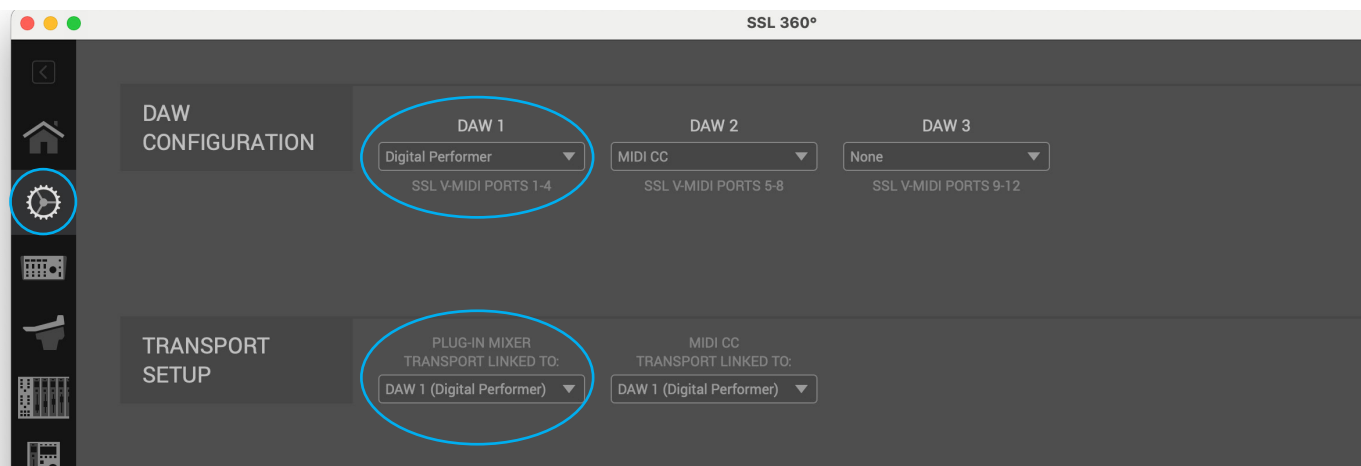


Bitwig Studio

1. Open the Bitwig Studio **Dashboard**, select **Settings** and then choose **Controllers** from the left-hand side menu.
2. Click **+Add Controller** and choose **Solid State Logic** from the **Hardware Vendor** drop-down list.
3. Choose **SSL UF8/UF1 by Bitwig**. Set the **MIDI Input** to **SSL V-MIDI Port 1 Source** and set the **MIDI Output** to **SSL V-MIDI Port 1 Destination**.

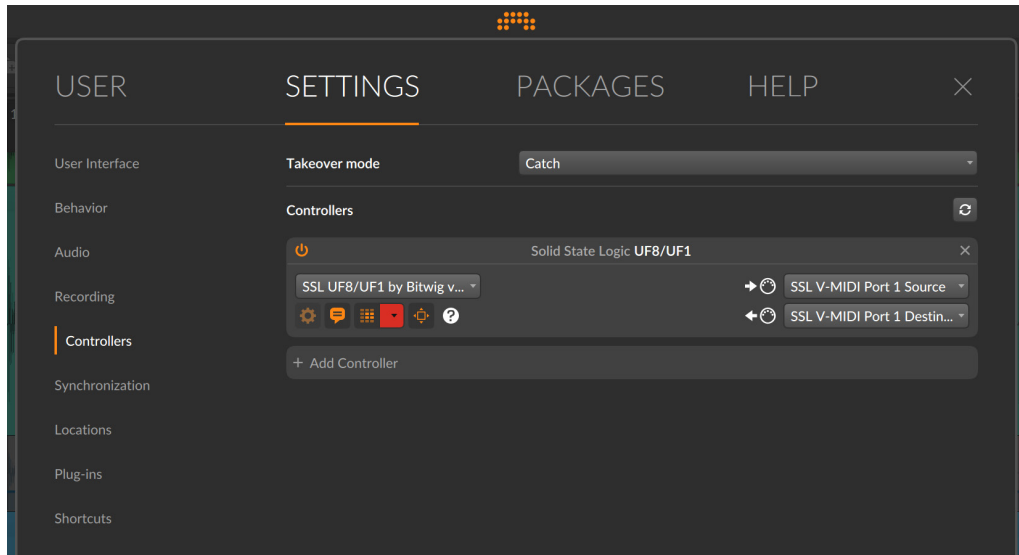


4. In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as **Bitwig** from the drop-down list and also select **DAW 1 (Bitwig)** in the **TRANSPORT LINKED TO** list below.

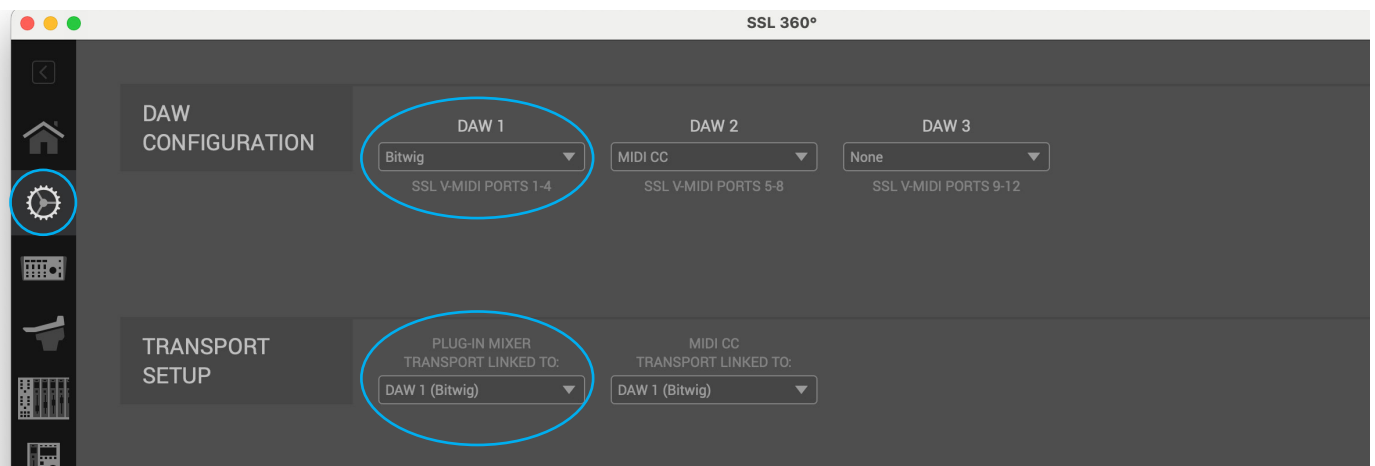


FL Studio

1. In FL Studio, go to the **Options** menu and open **MIDI settings**.
2. In the **Controller Type** drop-down list, choose **SSL 360 UF8/UF1**.
3. Configure the **Output Port** to **Port 1** and the **Input Port** to **Port 1**.
4. Ensure **Enable** is active.

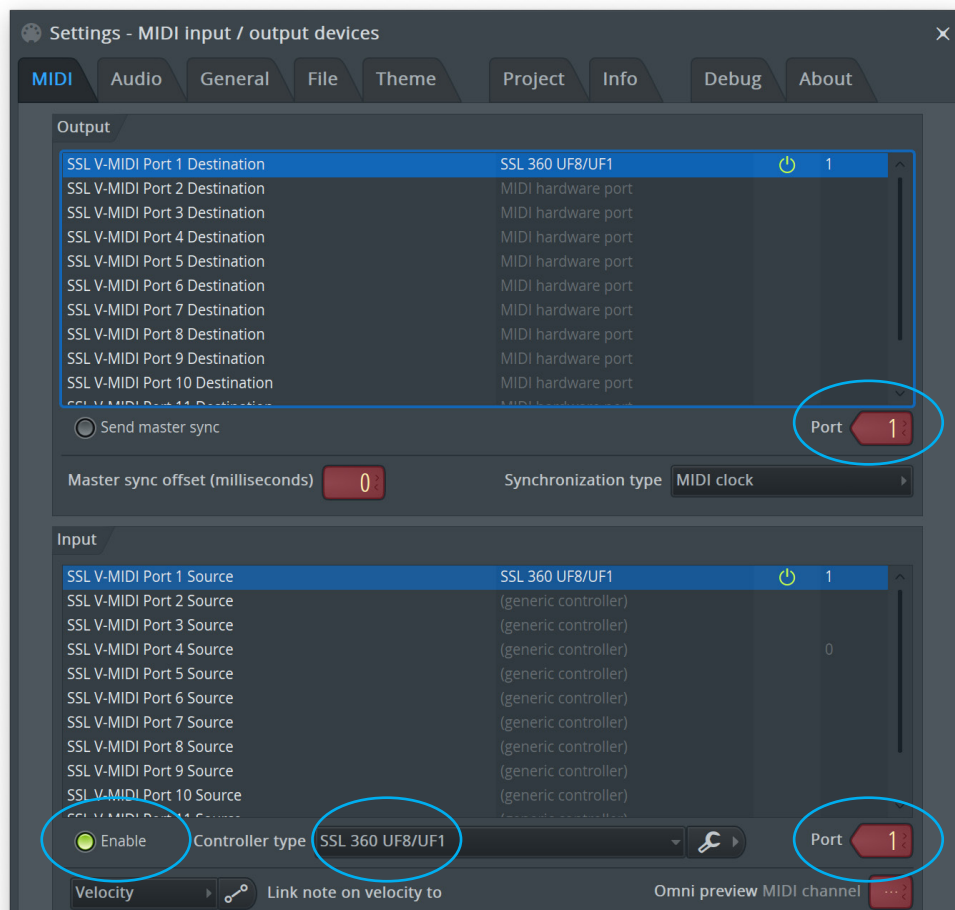


5. In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as **FL Studio** from the drop-down list and also select **DAW 1 (FL Studio)** in the **TRANSPORT LINKED TO** list below.

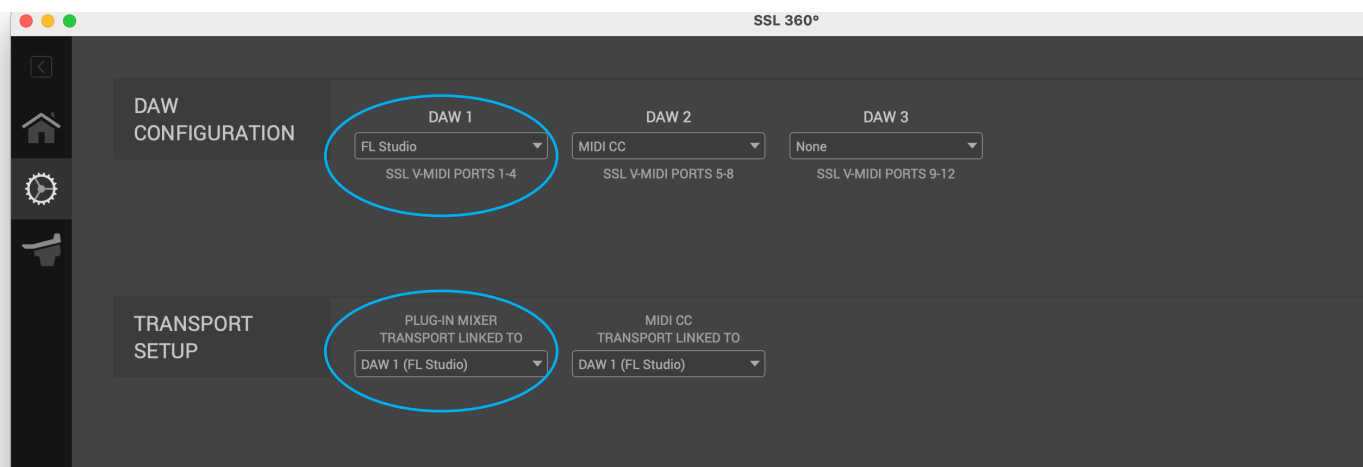


Mixbus 11

1. In Mixbus, go to the **Preferences** menu and choose **Control Surface**.
2. In the control surfaces list, enable **SSL 360: UF8 UF1** then click **Show Protocol Settings**.
3. Configure the **Surface sends via** dropdown to **SSL V-MIDI Port 1 Source**. Configure the **Surface receives via** dropdown to **SSL V-MIDI Port 1 Destination**.

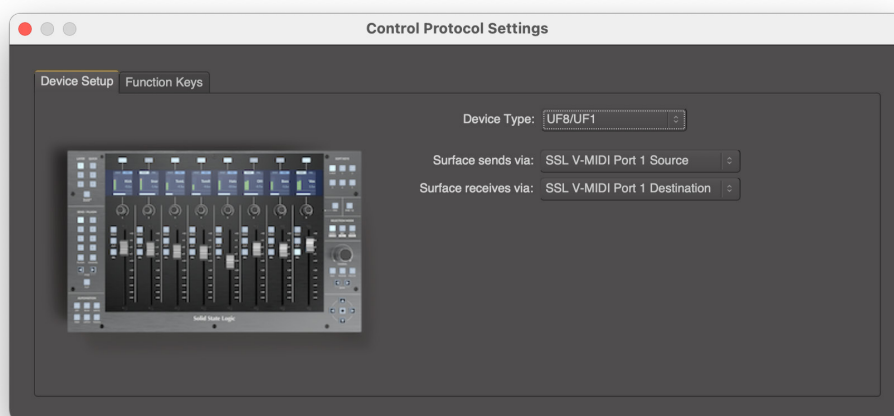


4. In SSL 360° on the **CONTROL SETUP** page configure **DAW 1** as **Mixbus** from the drop-down list and also select **DAW 1 (Mixbus)** in the **TRANSPORT LINKED TO** list below.

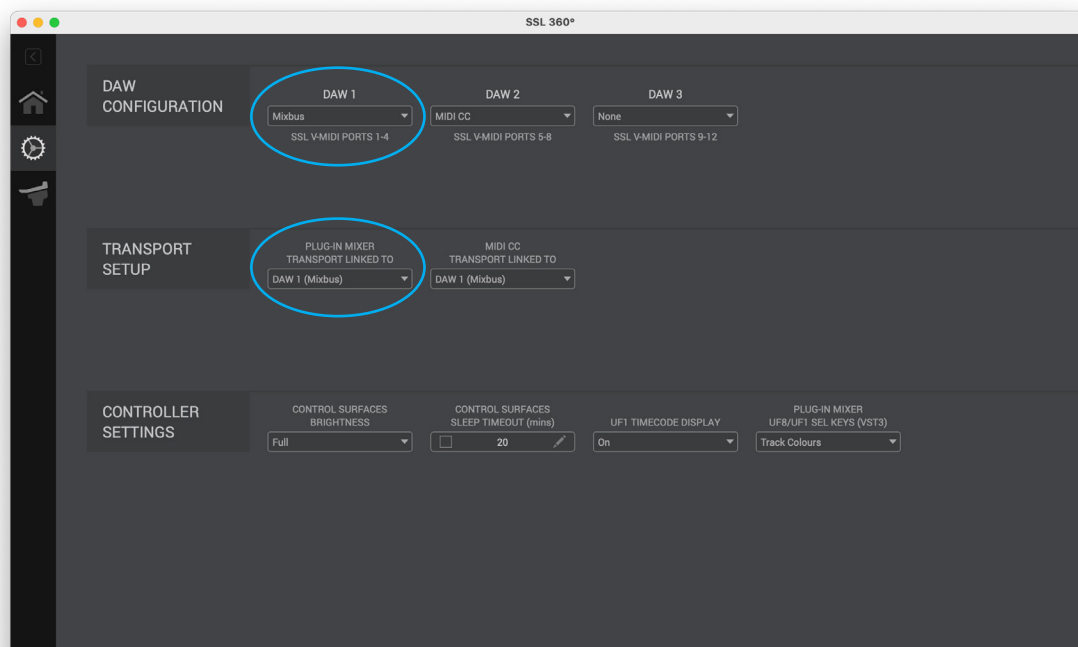


UC1 LCD Messages

The UC1 screen will display various messages:



SSL UC1 Logo


This message is displayed when you power up UC1, accompanying the power up/light up sequence.



'Awaiting Connection to SSL 360° Software'


This message means that UC1 is waiting for the SSL 360° software to start running on your computer. You may see this message appear when logging onto your computer, before the operating system has finished loading your user-profile and start-up items. You may also see this message if you are yet to plug USB cable from your UC1 into your computer.

a



'No Plug-ins'

This message means that you are connected to SSL 360° but either the DAW is closed or, the DAW is open but with no channel strip or bus compressor plug-ins instantiated.




'Attempting To Reconnect'

This message means that communication between SSL 360° and UC1 has been lost. If you experience this, then check that your USB cable connecting UC1 and 360° has not been removed. Re-connect if so.


SSL 360° Software Messages

You may encounter the following messages in SSL 360°. Here's what they mean:

If the **HOME** page of SSL 360° is displaying the message '**NO DEVICES CONNECTED**', then be sure to check that the USB cable from your computer to the **USB** port on UC1 has not come loose.

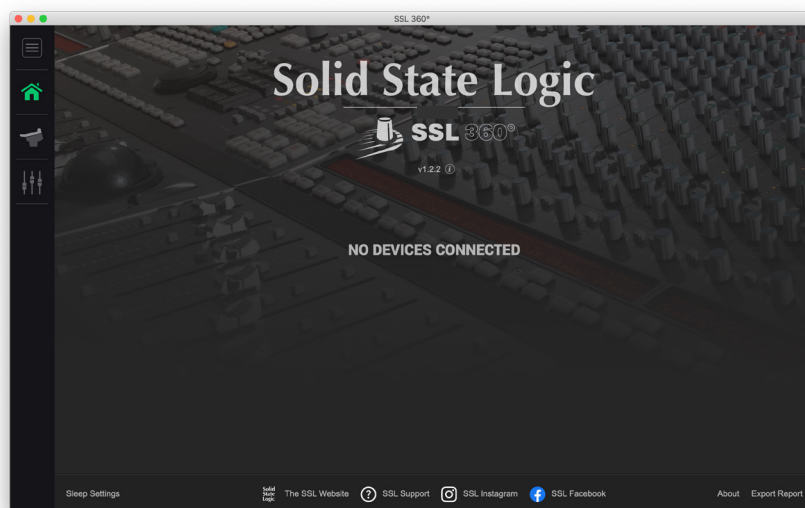


If the **HOME** page of SSL 360° is displaying the message '**SOMETHING WENT WRONG... PLEASE EXIT AND RE-LAUNCH SSL 360°**', then please quit SSL 360° and re-launch. If that does not work then restart your computer.

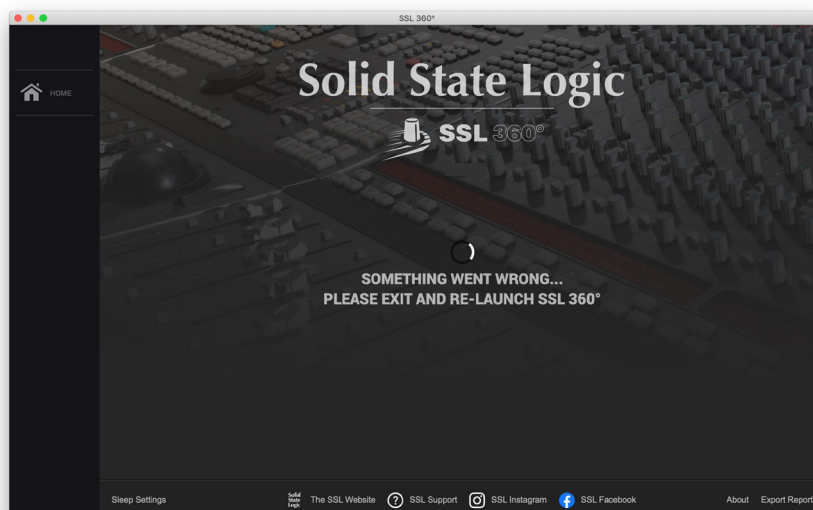

SSL Support - FAQs, Ask a Question and Compatibility

Visit the Solid State Logic Help Centre to check compatibility with your system and find answers to your questions:

www.solidstatellogic.com/support

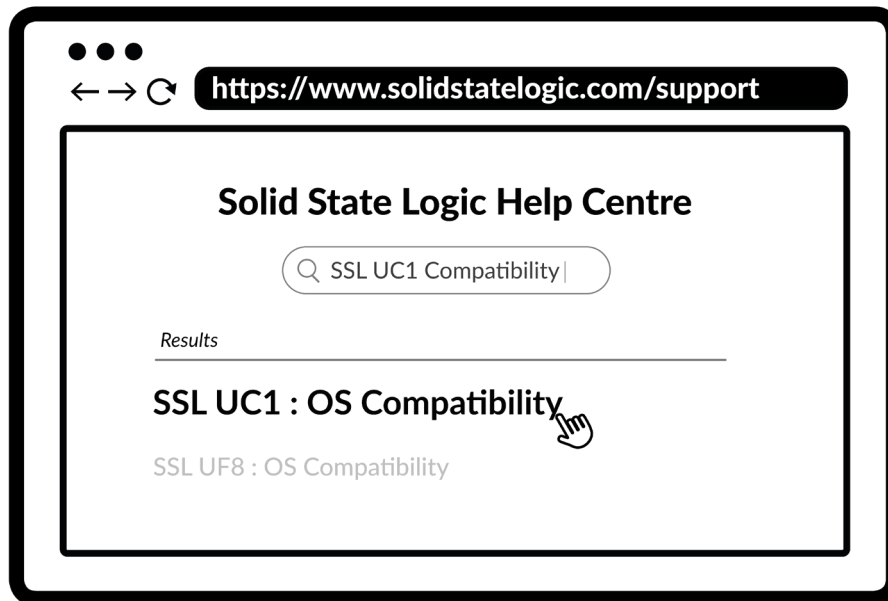

Thank you

Don't forget to register your UC1 for the best possible experience.

www.solidstatellogic.com/get-started

Safety Notices

General Safety

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of an obsolete outlet.
- Protect the adapter and power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use the attachments/accessories recommended by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Do NOT modify this unit, alterations may affect performance, safety and/or international compliance standards.
- SSL does not accept liability for damaged caused by maintenance, repair or modification by unauthorised personnel.

Installation Notes

- When using this apparatus place it on a secure level surface.
- Always allow free flow of air around the unit for cooling. We recommend the use of rackmount kit available from SSL.
- Ensure that no strain is placed on any cables connected to this apparatus. Ensure that all such cables are not placed where they can be stepped on, pulled or tripped over.

WARNING: To reduce the risk of fire or electric shock do not expose this apparatus to rain or moisture.

ATTENTION: Afin de réduire les risques de choc électrique, ne pas exposer cet appareil à l'humidité ou à la pluie.

Power Safety

- UC1 is supplied with an external 12 V DC desktop power supply with a 5.5 mm plug to connect to the unit. A standard IEC mains lead is provided to power the DC supply however if you decide to use a mains cable of your choice, bear in mind the following:
 - 1) The adapter power cord should ALWAYS be earthed with the earth on the IEC socket.
 - 2) Please use-compliant 60320 C13 TYPE SOCKET. When connecting to supply outlets ensure that appropriate sized conductors and plugs are used to suit local electrical requirements.
 - 3) Maximum cord length should be 4.5 m (15').
 - 4) The cord should bear the approval mark of the country in which it is to be used.
- Connect only to an AC power source that contains a protective earthing (PE) conductor.
- Only connect units to single phase supplies with the neutral conductor at earth potential.
- Both the mains plug and appliance coupler can be used as the disconnect device, ensure that the mains plug is connected to an unobstructed wall outlet and is permanently operable.

General Safety



ATTENTION! The desktop power supply must always be earthed. Refer to the User Guide for further details.



CAUTION! No user-serviceable parts inside. In the event of damage to the unit or power supply contact Solid State Logic. Service or repair must be done by qualified service personnel only.

CE Certification



UC1 is CE compliant. Note that any cables supplied with SSL equipment may be fitted with ferrite rings at each end. This is to comply with the current regulations and these ferrites should not be removed.

FCC Certification

- Do not modify this unit! The product, when installed as indicated in the instructions contained in the installation manual, meets FCC requirements.
- Important: This product satisfies FCC regulations when high quality shielded cables are used to connect with other equipment. Failure to use high quality shielded cables or to follow the installation instructions may cause magnetic interference with appliances such as radios and televisions and will void your FCC authorisation to use this product in the USA.
- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - 1) Reorient or relocate the receiving antenna.
 - 2) Increase the separation between the equipment and receiver.
 - 3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - 4) Consult the dealer or an experienced radio/TV technician for help.

Industry Canada Compliance

This Class B digital apparatus complies with Canadian ICES - 003.

RoHS Notice

Solid State Logic complies with and this product conforms to European Union's Directive 2011/65/EU on Restrictions of Hazardous Substances (RoHS) as well as the following sections of California law which refer to RoHS, namely sections 25214.10, 25214.10.2, and 58012, Health and Safety Code; Section 42475.2, Public Resources Code.



Instructions for disposal of WEEE by users in the European Union

The symbol shown here, which is on the product or on its packaging, indicates that this product must not be disposed of with other waste. Instead, it is the user's responsibility to dispose of their waste equipment by handing it over to a designated collection point for recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or where you purchased the product.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Evaluation of apparatus based on altitude not exceeding 2000 m. There may be some potential safety hazard if the apparatus is operated at altitude exceeding 2000 m.



Evaluation of apparatus based on temperate climate conditions only. There may be some potential safety hazard if the apparatus is operated in tropical climate conditions.

Electromagnetic Compatibility

EN 55032:2015, Environment: Class B, EN 55103-2:2009, Environments: E1 - E4.
Electrical Safety: UL/IEC 62368-1:2014.

WARNING: Operation of this equipment in a residential environment could causes radio interference.

Environmental

Temperature: Operating: +1 to 30 degrees Celsius. Storage: -20 to 50 degrees Celsius.

Further information

For additional information, install and user guides, knowledge base and technical support visit www.solidstatelogic.com

